

L810-40 _ _ _ High Power Metal Stem LED Lamp

The series of L810-40 _ _ _ is an GaAlAs LED mounted on a metal stem and covered with epoxy resin or hermetically sealed with $\phi 5$ glass-lens can.

On forward bias it emits a high power radiation, which peaks at 810nm.

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	PD	170	mW	Ta=25°C
Forward Current	IF	100	mA	Ta=25°C
Pulse Forward Current	IFP	500	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Operating Temperature	TOPR	-30 ~ +90	°C	Ta=25°C
Storage Temperature	TSTG	-30 ~ +100	°C	
Soldering Temperature	TSOL	260	°C	

‡ Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡ Soldering condition: Soldering condition must be completed within 3 seconds at 260°C

◆ Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA		1.60	1.80	V
Reverse Current	IR	VR=5V			10	uA
Peak Wavelength	λP	IF=50mA	790	810	830	nm
Half Width	$\Delta\lambda$	IF=50mA		35		nm
Rise Time	tr	IF=50mA		60		ns
Fall Time	tf	IF=50mA		40		ns


◆ Total Radiant Power and Radiant Intensity at IF=50mA [Ta=25°C]

Type No.	Total Radiant Power unit:mW			Radiant Intensity unit:mW/sr			Viewing Half Angle
	Minimum	Typical	Maximum	Minimum	Typical	Maximum	
L810-40K00	9	15			6		$\pm 40^\circ$
L810-40K42	6	12			60		$\pm 6^\circ$
L810-40M00	11	18			10		$\pm 40^\circ$
L810-40M32	8	13			40		$\pm 10^\circ$
L810-40T52	4	6.5			4		$\pm 55^\circ$

‡ Radiant Intensity is measured by Tektronix J6512

‡ Total Radiated Power is measured by Photodyne #500.

◆ Outer dimension (Unit: mm)

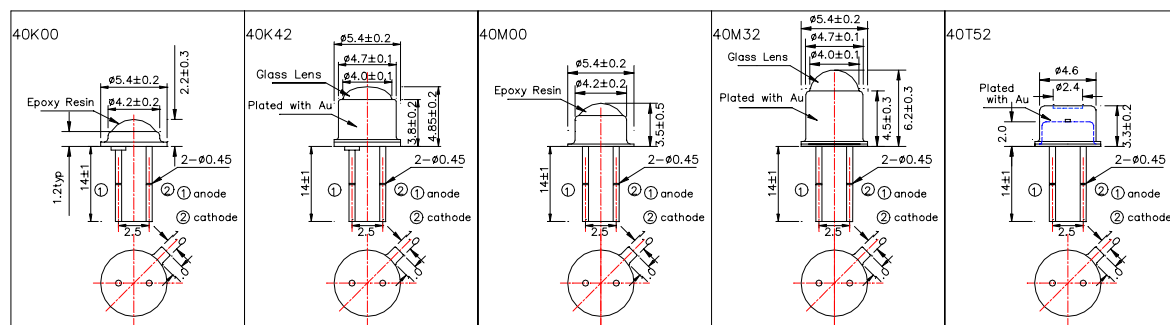

Marubeni

Marubeni America Corporation

3945 Freedom Circle, Suite 1000, Santa Clara, CA 95054

408-330-0650 (Ext. 323), 408-330-0655 (Fax), sales@tech-led.com