


L415R-04**UV LED Lamp with UV Resistant Resin**

L415R-04 is an InGaN LED mounted on a lead frame with UV resistant resin.
On forward bias, it emits a band of visible light that peaks 415nm.
This UV series is designed for long life under UV beam.

<Specifications>

1. Product Name: UV LED Lamp
2. Type Number: L415R-04
3. Chip:
 - Chip material: InGaN
 - Peak Wavelength: 415nm typ.
4. Package
 - Type: Φ5mm clear molding
 - Resin Material: UV Resin
 - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

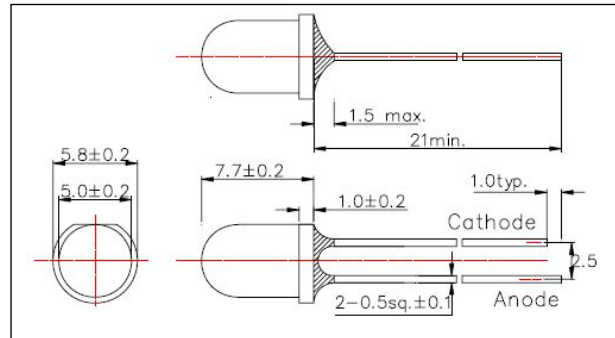

Absolute Maximum Ratings				
Item	Symbol	Maximum Rated Value	Unit	Ambient Temp.
Power Dissipation	PD	110	mW	Ta=25°C
Forward Current	IF	30	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Operating Temperature	TOPR	-20 ~ +85	°C	
Storage Temperature	TSTG	-20 ~ +100	°C	
Soldering Temperature*	TSOL	260	°C	

* Soldering condition must be completed within 5 second at 265 °C.

Electro-Optical Characteristics						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=20mA		3.4	4.3	V
Reverse Current	IR	VR=5V			10	uA
Radiated Power*	PO	IF=20mA	6.0	12.0		mW
Radiant Intensity**	IE	IF=20mA		18		mW/sr
Brightness***	IV	IF=20mA		15		mcd
Peak Wavelength	λP	IF=20mA	410	415	420	nm
Half Width	Δλ	IF=20mA		15		nm
Viewing Half Angle	θ1/2	IF=20mA		±20		deg

* Measured by S3584-08

** Measured by Ando Optical Multi Meter AQ2140&AQ2741

*** Measured by Tektronix J-16

