Regina reflector for Osram Oslon SSL series of LEDs

OSRAM
www.osram.com



- Designed & optimized for Osram Oslon SSL series of LEDs
- Reflector material metallized PC. with high UV and temperature resistance (130°C/220°F). Allows use of high current and temperature conditions
- Best available optical efficiency, over 90%
- Small position pins, fastening to heat sink with droplets of glue.
- Compact dimensions 19mm x 15.3 mm (+ position pins 2.5mm)

REFLECTOR TYPES

NAME	ORDERING CODE	FWHM Angle
Regina reflector	C11347_Regina-OSL	±5°

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

Ledil Oy
Tehdaskatu 13
FIN-24100 SALO, Finland

www.ledil.com
email: ledil@ledil.com
FAX: +358-2-733 8001

2010-02-10

MEASUREMENTS

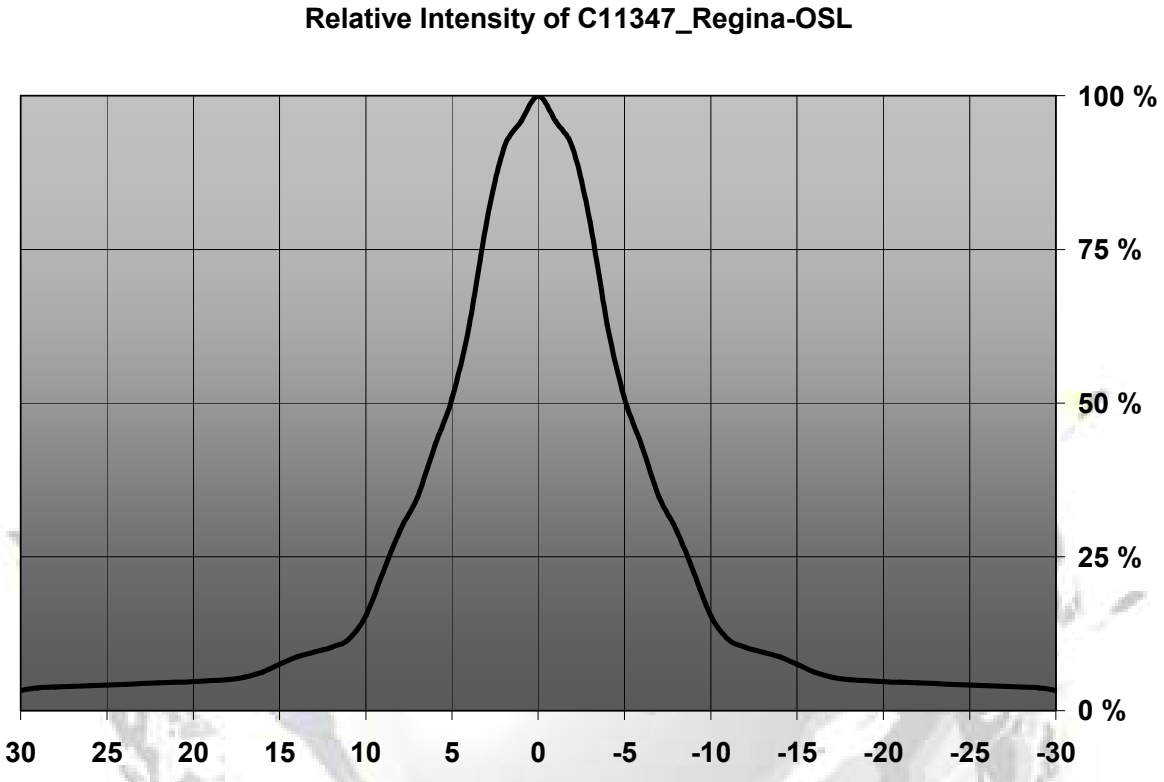

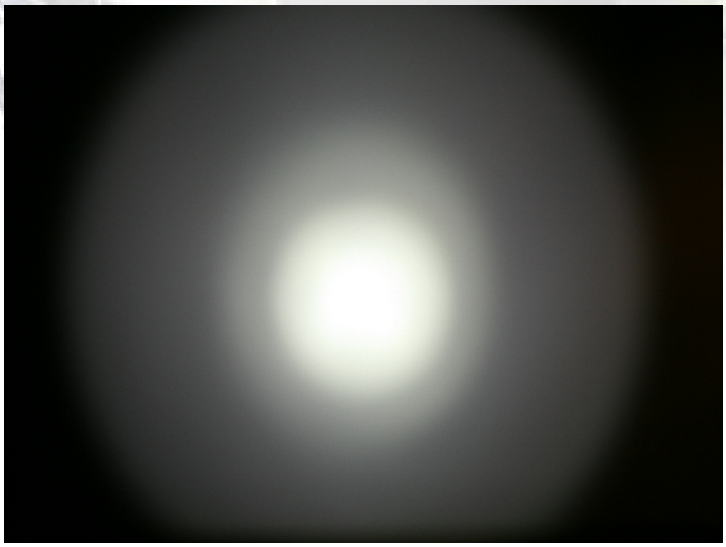

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

Ledil Oy
Tehdaskatu 13
FIN-24100 SALO, Finland

www.ledil.com
email: ledil@ledil.com
FAX: +358-2-733 8001

2010-02-10

DRAWINGS

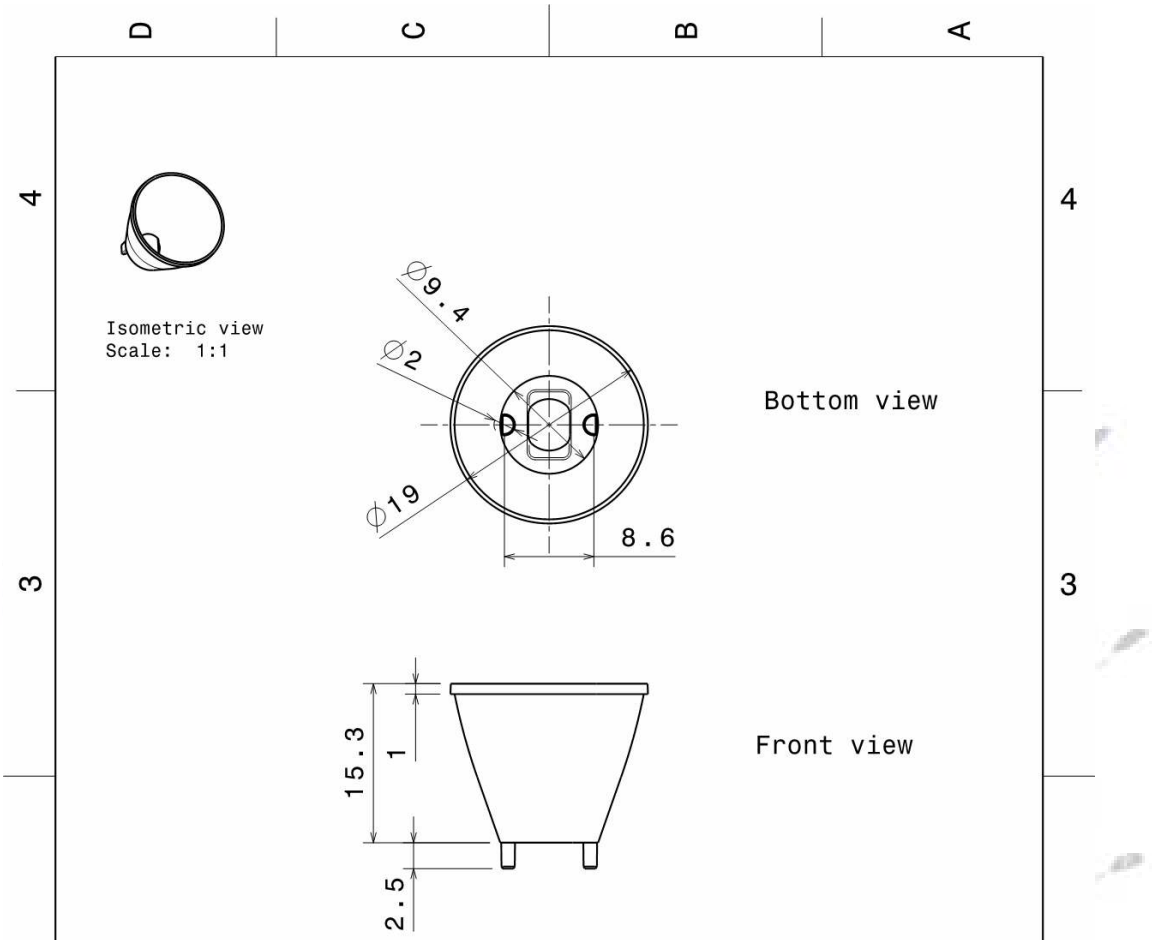

This drawing is our property. It can't be reproduced or communicated without our written agreement.		Ledil Oy Tehdaskatu 13 FIN-24100 SALO Finland	
DRAWN BY: pv	DATE: 21.12.2009	DRAWING TITLE: Datasheet Regina Reflector	
CHECKED BY: hh	DATE: 14.12.2009	SIZE: A4	DRAWING NUMBER: C11347 / REV: 1
DESIGNED BY: pv	DATE: 19.11.2009	SCALE: 2:1 / WEIGHT(g)	SHEET: 1/1

© Ledil Oy – PRELIMINARY - Subject to change without prior notice

Ledil Oy
Tehdaskatu 13
FIN-24100 SALO, Finland

www.ledil.com
email: ledil@ledil.com
FAX: +358-2-733 8001