Marubeni

Data Sheet


2024.10

PRELIMINARY

EDCC630V-1100

630nm High Power Compact Size LED

Outline and Internal Circuit

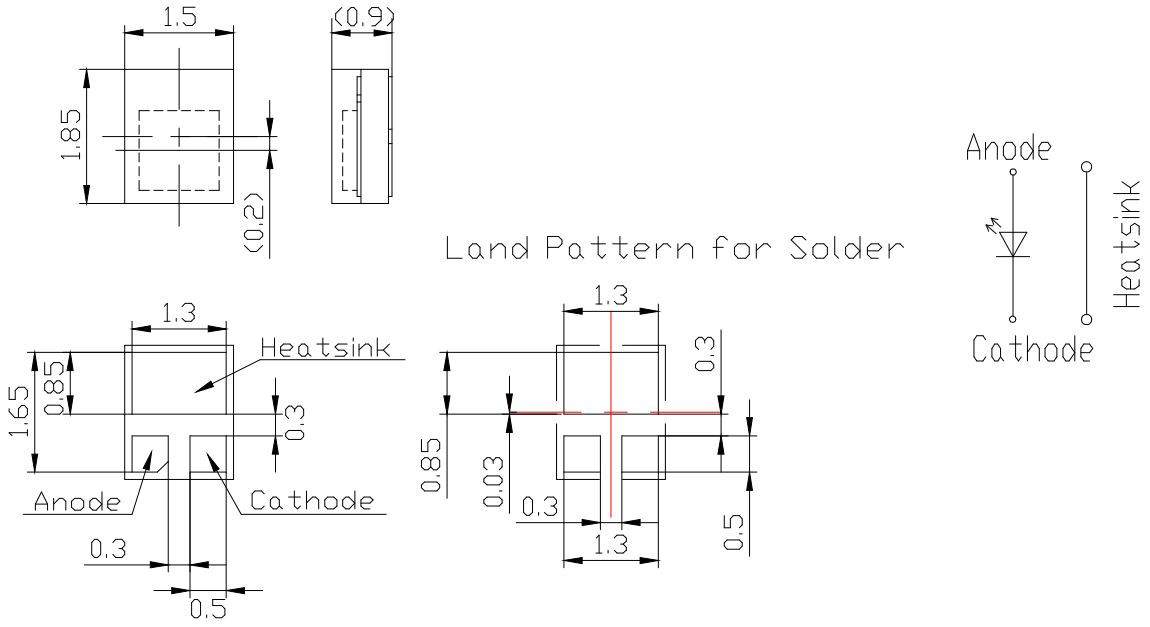

(Unit : mm)

Features

· Chip Material : AlGaInP

· Chip Dimension : 1mm * 1mm

· Number of Chips : 1pce

· Peak Wavelength : 630nm typ.

· Lead Frame Die : Ceramics

· Lens : Silicone Resin

Marubeni

EDCC630V-1100

Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Ratings	Unit
Power Dissipation	PD	2000	mW
Forward Current	IF	700	mA
Pulse Forward Current	IFP	2000	mA
Reverse Voltage	VR	5	V
Thermal Resistance	Rthjs	20	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	Topr	-40 ~ +100	°C
Storage Temperature	Tstg	-40 ~ +100	°C

‡Pulse Forward Current condition : Duty 1% and Pulse Width=10us.

‡Soldering condition : Refer to technical support information on the website.

Optical and Electrical Characteristics (Tc=25°C)


(*: 100% testing, **: reference value)


Parameter		Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage		VF		2.2	2.8	V	IF=350mA*
		VFP		3.5			IFP=2A**
Reverse Current		IR			10	uA	VR=5V*
Total Radiated Power		PO		250		mW	IF=350mA**
				1200			IFP=2A**
Radiant Intensity		IE		50		mW/sr	IF=350mA**
				250			IFP=2A**
Luminous Flux		ΦV		55		lm	IF=350mA**
Peak Wavelength		λp	620		640	nm	IF=350mA**
Dominant Wavelength		λD		622		nm	IF=350mA**
Half Width		Δλ		15		nm	IF=350mA**
Viewing Half Angle	Long	θ1/2		±66		deg.	IF=100mA**
	Short			±65			
Rise Time		tr		60		ns	IF=350mA**
Fall Time		tf		20		ns	IF=350mA**


‡ Radiated Power is measured by S3584-08.


‡ Radiant Intensity is measured by CIE127-2007 Condition B. (used the updated measurement jig in 2024)

Typical Characteristic Curves

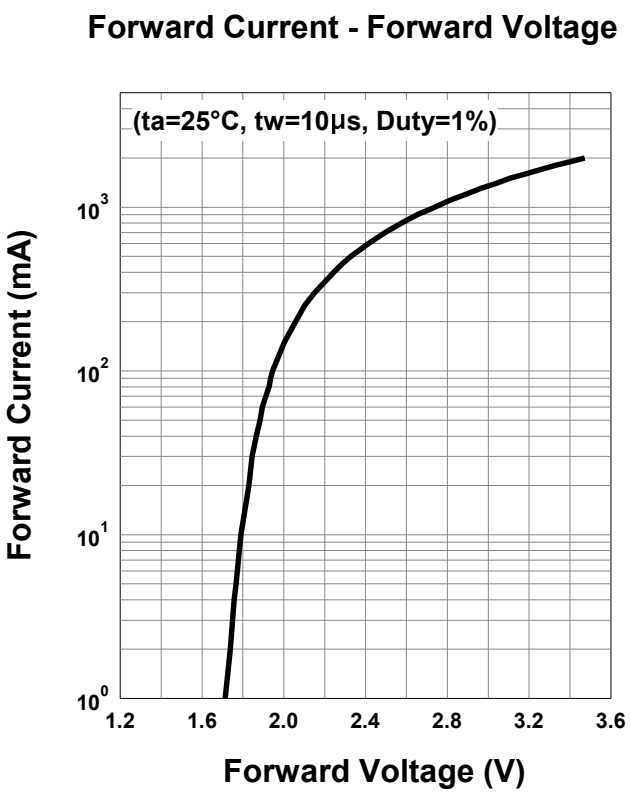

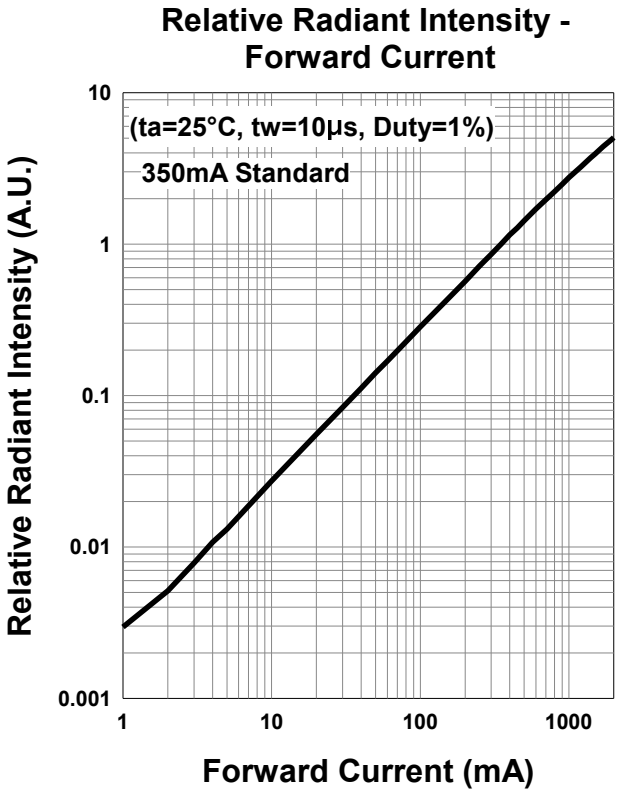

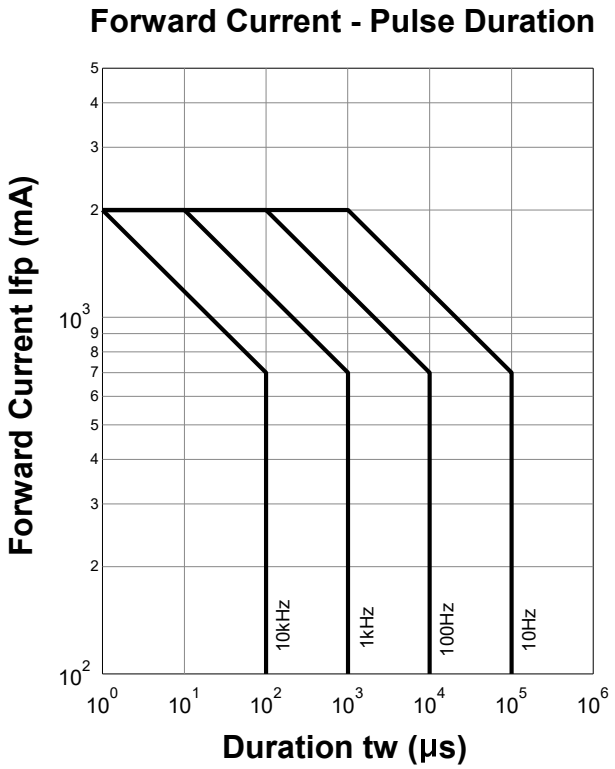


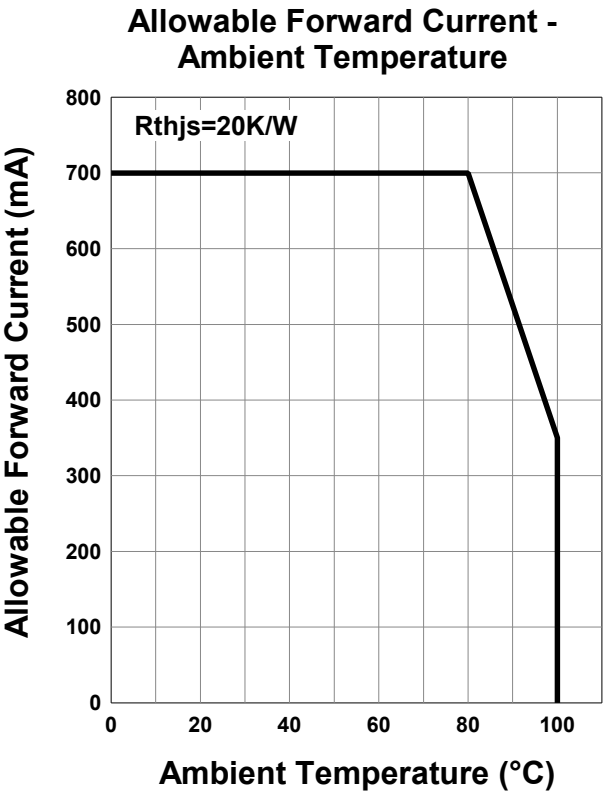


Marubeni

EDCC630V-1100


Forward Voltage - Ambient Temperature

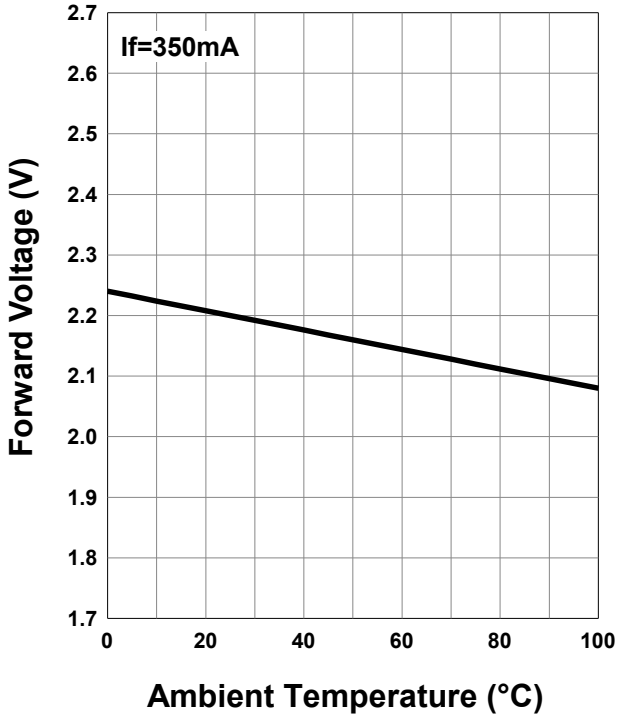


Relative Radiant Intensity - Ambient Temperature

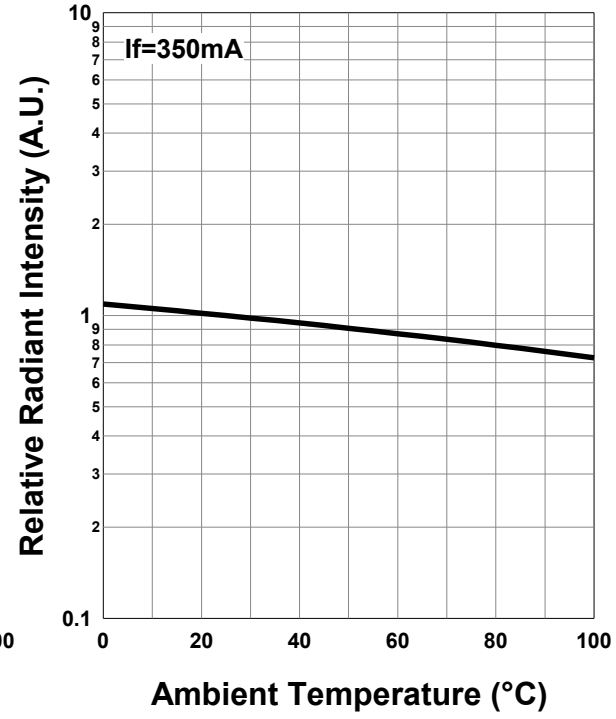

Peak Wavelength - Ambient Temperature

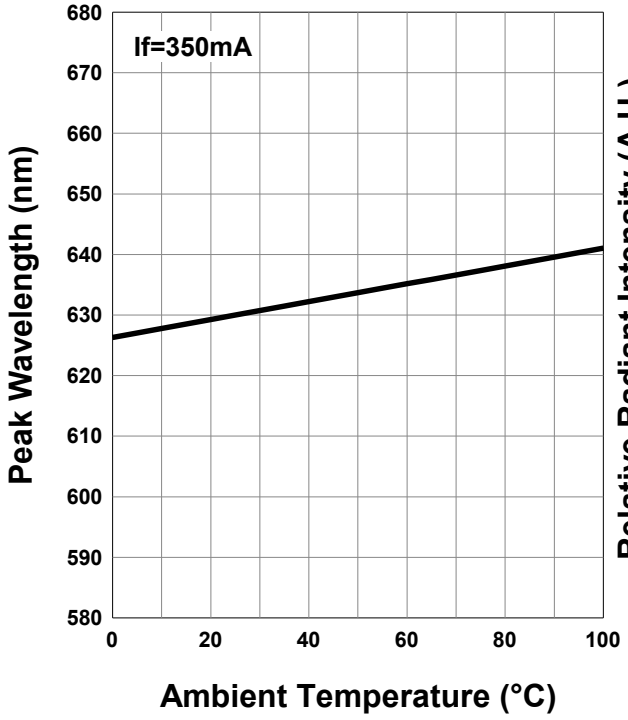



Relative Spectral Emission

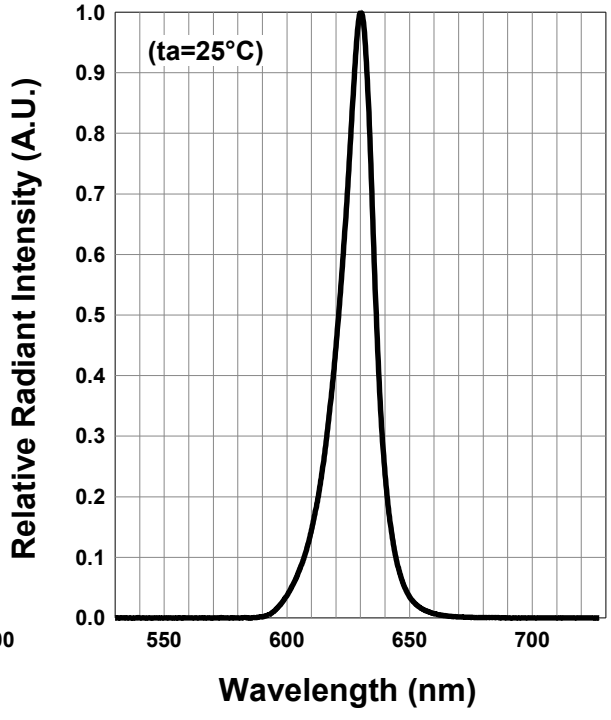


Marubeni

EDCC630V-1100

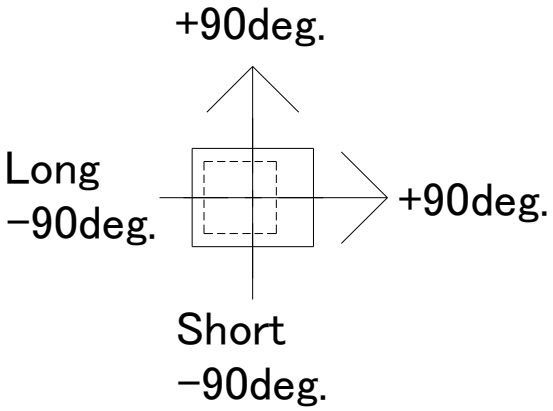

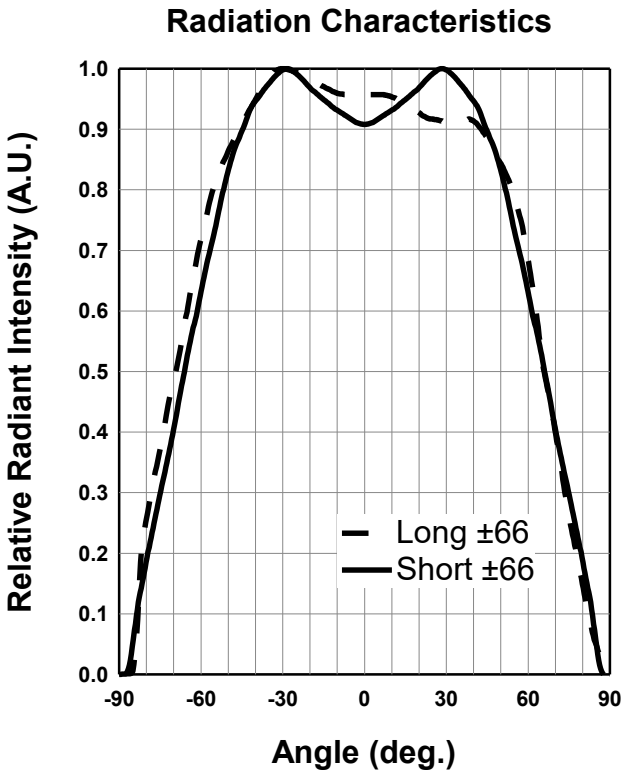

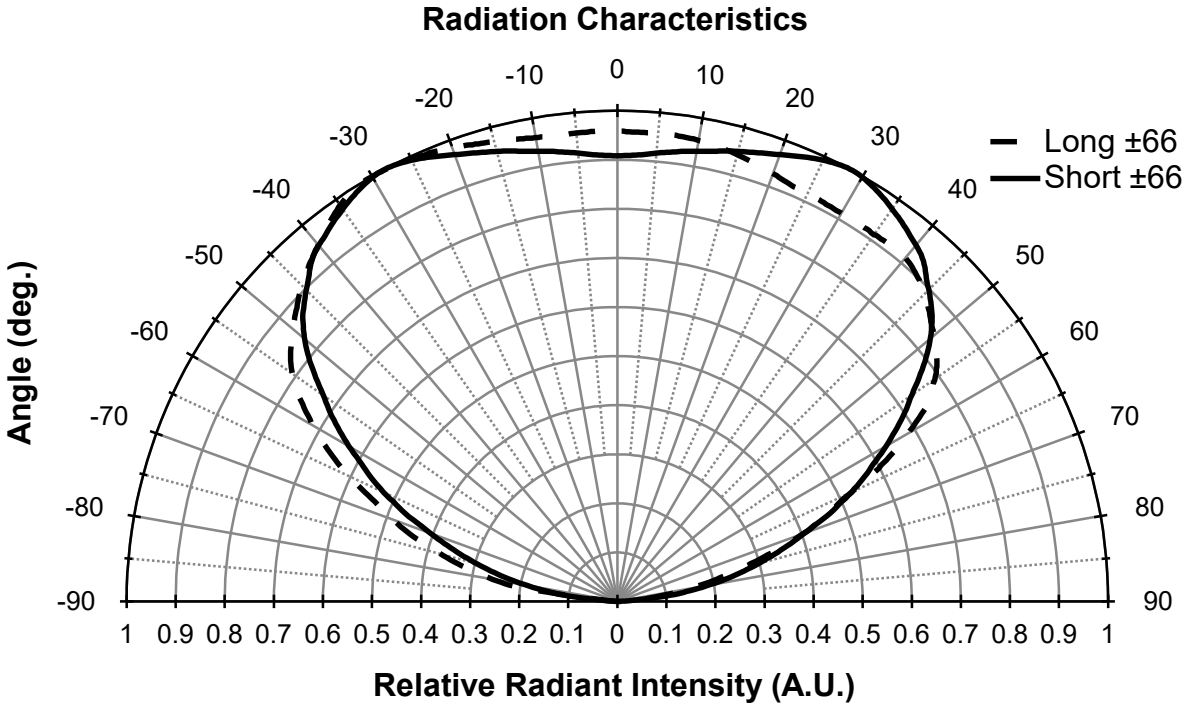

Wrapping

Moisture barrier bag aluminum laminated film with a desiccant to keep out the moisture absorption during the transportation and storage.

SMD LED storage and handling precautions

Storage Conditions before Opening a Moisture-Barrier Aluminum Bag

- Before opening a moisture-barrier aluminum bag, please store it at <30ºC, <60%RH.
- Please note that the maximum shelf life is 12 months under these conditions.

Storage Conditions after Opening a Moisture-Barrier Aluminum Bag

- After opening a moisture-barrier aluminum bag, store the aluminum bag and silica gel in a desiccator.
- After opening the bag, please solder the LEDs within 72 hours in a room with 5 - 30ºC, <50%RH.
- Please put any unused, remaining LEDs and silica gel back in the same aluminum bag and then vacuum-seal the bag.
- It is recommended to keep the re-sealed bag in a desiccator at <30%RH.
- The 72-hour- long floor life does not include the time while LEDs are stored in the moisture-barrier aluminum bag. However, we strongly recommend to solder the LEDs as soon as possible after opening the aluminum bag.

Notes about Re-sealing a Moisture-Barrier Aluminum Bag

- When vacuum-sealing an opened aluminum bag, if you find the moisture-indicator of the silica gel has changed to pink from blue (indicating a relative humidity of 30 % or more), please do not use the unused LEDs, the aluminum bag, or the silica gel.

Notes about Opening a Re-sealed Moisture-Barrier Aluminum Bag

- When opening a vacuumed and re-sealed aluminum bag in order to use the remaining LEDs stored in the bag, if you find that the moisture-indicator of the silica has changed to pink, please do not use the LEDs.

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

Technical Support Information

The product is manufactured by USHIO Inc. and the spec information is also from USHIO Inc.

Marubeni America Corporation
Email: sales@tech-led.com | URL: www.tech-led.com