Marubeni

Data Sheet


2026.02

PRELIMINARY

L735D-33

Infrared LED Lamp

Outline and Internal Circuit

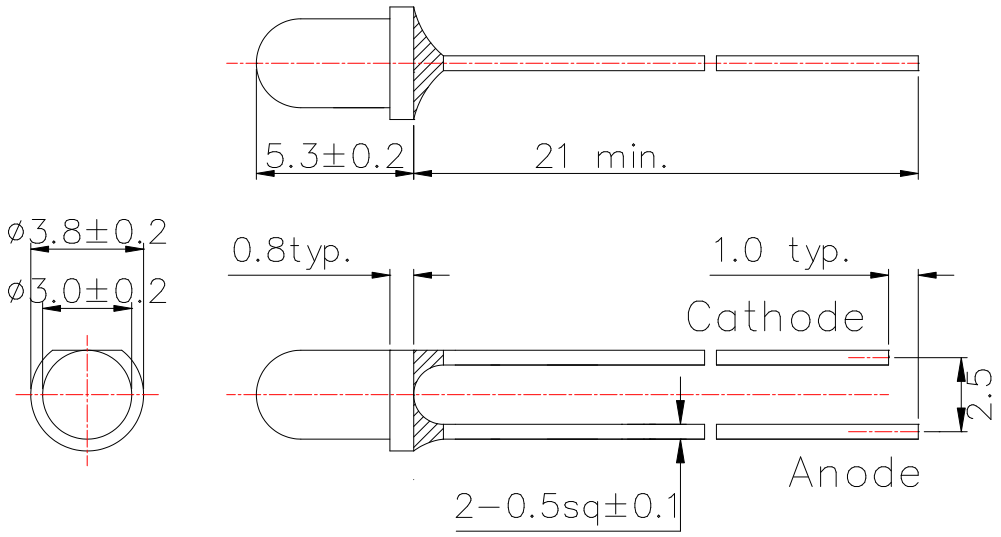

(Unit : mm)

Features

· Chip Material : AlGaInP

· Chip Dimension : 350um * 350um

· Number of Chips : 1pce

· Peak Wavelength : 735nm typ.

· Package Type : ·3mm clear molding

· Lead Frame : Soldered (Lead Free)

· Lens : Epoxy Resin

Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Ratings	Unit
Power Dissipation	PD	240	mW
Forward Current	IF	100	mA
Pulse Forward Current	IFP	500	mA
Reverse Voltage	VR	5	V
Thermal Resistance	Rthjs	300	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	Topr	-40 ~ +100	°C
Storage Temperature	Tstg	-40 ~ +100	°C

‡Pulse Forward Current condition : Duty 1% and Pulse Width=10us.

‡Soldering condition : Refer to technical support information on the website.

Optical and Electrical Characteristics (Tc=25°C)


(*: 100% testing, **: reference value)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	VF		2.1	2.4	V	IF=50mA*
	VFP		4.4			IFP=500mA**
Reverse Current	IR			10	uA	VR=5V*
Total Radiated Power	PO	25	35		mW	IF=50mA*
			350			IFP=500mA**
Radiant Intensity	IE		TBC		mW/sr	IF=50mA**
			TBC			IFP=500mA**
Peak Wavelength	λp	725		745	nm	IF=50mA*
Half Width	Δλ		21		nm	IF=50mA**
Viewing Half Angle	θ1/2		TBC		deg.	IF=50mA**
Rise Time	tr		50		ns	IF=50mA**
Fall Time	tf		25		ns	IF=50mA**


‡ Radiated Power is measured by S3584-08.


‡ Radiant Intensity is measured by CIE127-2007 Condition B. (used the updated measurement jig in 2024)

Typical Characteristic Curves

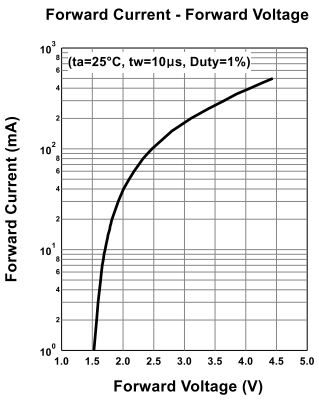


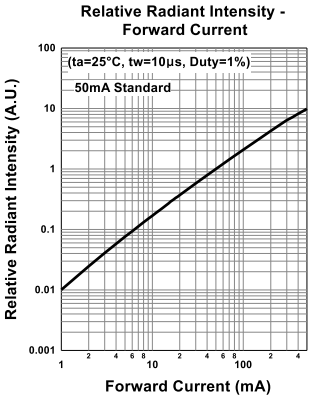

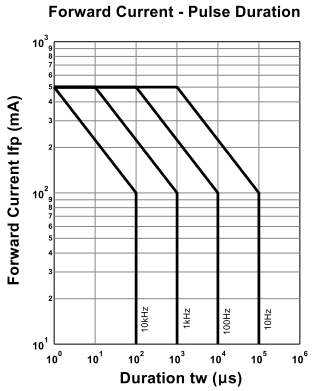


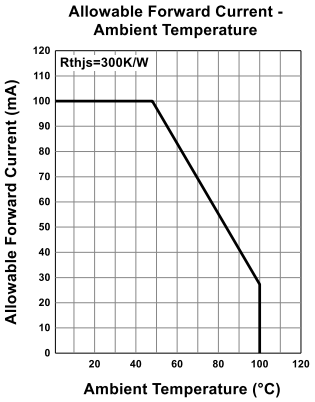


Forward Voltage -
Ambient Temperature

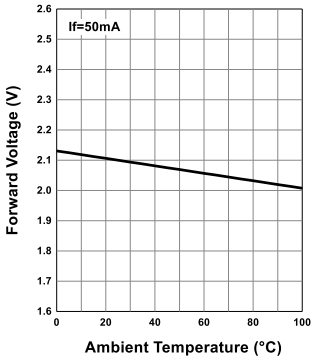

Relative Radiant Intensity -
Ambient Temperature

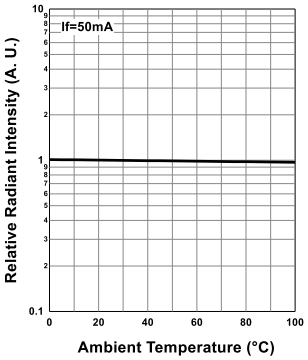


Peak Wavelength -
Ambient Temperature

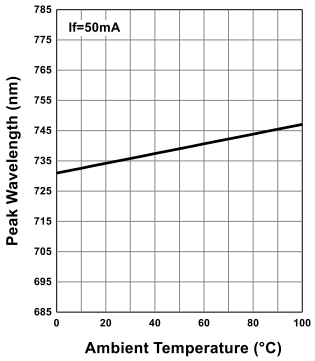


Marubeni

L735D-33


Relative Spectral Emission

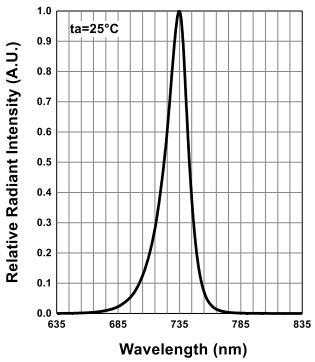

Radiation Characteristics

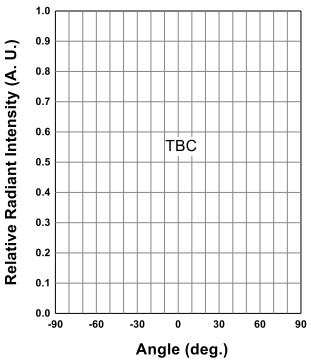

Radiation Characteristics

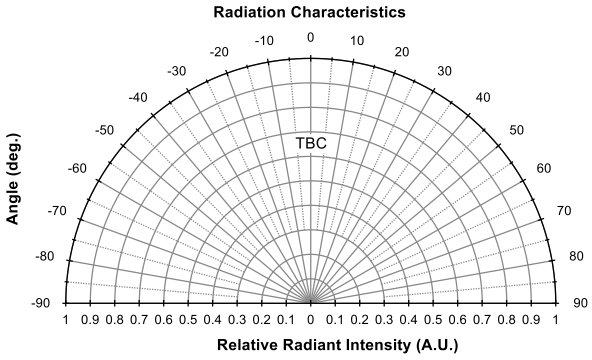

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

Technical Support Information

The product is manufactured by USHIO Inc. and the spec information is also from USHIO Inc.

Marubeni America Corporation
Email: sales@tech-led.com | URL: www.tech-led.com