Marubeni

Data Sheet


2024.02

PRELIMINARY

SMBB1370D-1100 rev. B

1370nm High Power TOP LED

Outline and Internal Circuit

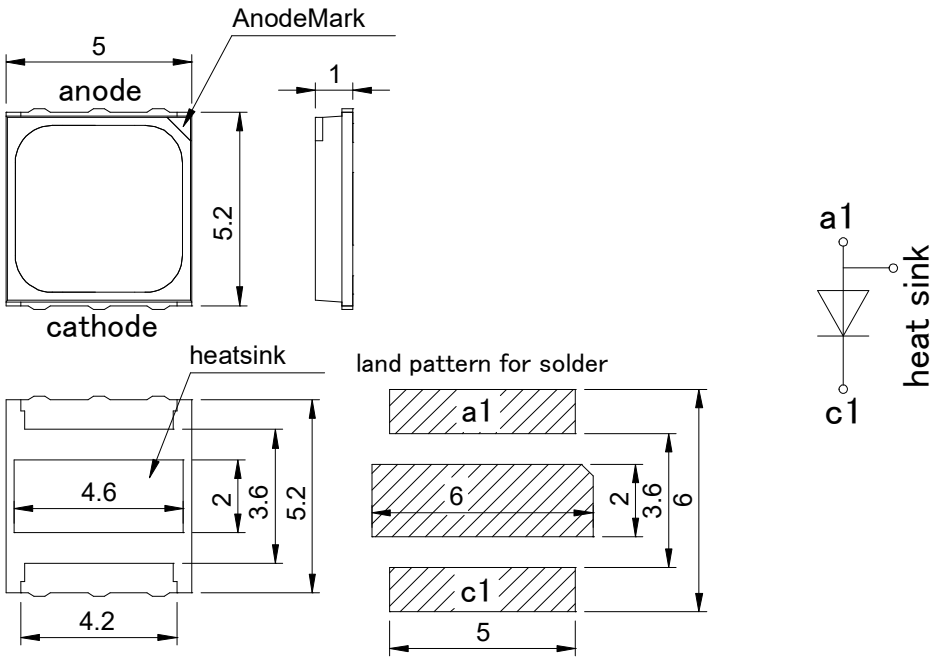

(Unit : mm)

Features

· Chip Material : InGaAsP

· Chip Dimension : 1mm * 1mm

· Number of Chips : 1pce

· Peak Wavelength : 1370nm typ.

· Lead Frame Die : Silver Plated on Copper

· Package Resin : Polyamide Resin

· Lens : Silicone Resin

Marubeni

SMBB1370D-1100 rev. B

Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Ratings	Unit
Power Dissipation	P_D	3500	mW
Forward Current	I_F	1500	mA
Pulse Forward Current	I_{FP}	4000	mA
Reverse Voltage	V_R	5	V
Thermal Resistance	R_{thjs}	10	K/W
Junction Temperature	T_j	120	°C
Operating Temperature	T_{opr}	-40 ~ +100	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Soldering Temperature	T_{SOL}	250	°C

‡Pulse Forward Current condition : Duty 1% and Pulse Width=10us.

‡Soldering condition : Refer to technical support information on the website.

Marubeni

SMBB1370D-1100 rev. B

Optical and Electrical Characteristics (Tc=25°C)

(*: 100% testing, **: reference value)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	VF		1.6	2.0	V	IF=1A*
			1.8	(2.6)		IF=1.5A**
	VFP		2.1			IFP=2A**
			2.4			IFP=3A**
			2.7			IFP=4A**
Reverse Current	IR			10	uA	VR=5V*
Total Radiated Power	PO	58	88		mW	IF=1A*
		(65)	100			IF=1.5A**
			150			IFP=2A**
			180			IFP=3A**
			200			IFP=4A**
Radiant Intensity	IE		29		mW/sr	IF=1A**
			33			IF=1.5A**
			50			IFP=2A**
			60			IFP=3A**
			66			IFP=4A**
Peak Wavelength	λp	1320		1420	nm	IF=1A*
Half Width	Δλ		110		nm	IF=1A**
Viewing Half Angle	θ1/2		±64		deg.	IF=100mA**
Rise Time	tr		90		ns	IF=1A**
Fall Time	tf		30		ns	IF=1A**

‡ Radiated Power is measured by G8370-85.


‡ Radiant Intensity is measured by ANDO Optical Multi Meter AQ2140 & AQ2743.

Marubeni


SMBB1370D-1100 rev. B

Typical Characteristic Curves


Forward Current - Forward Voltage

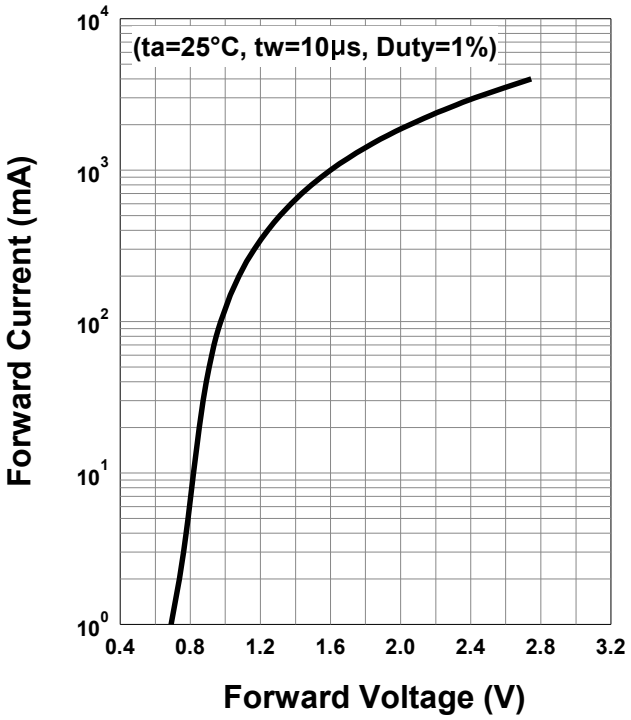


Relative Radiant Intensity - Forward Current

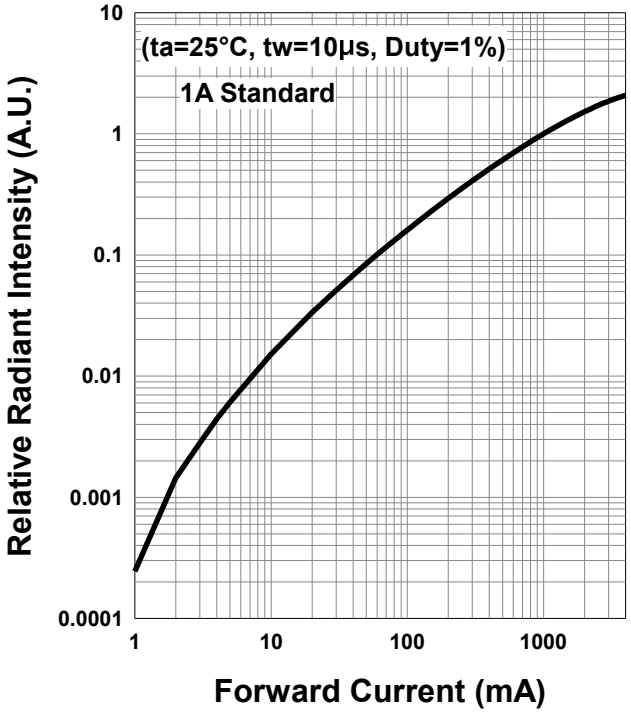

Forward Current - Pulse Duration

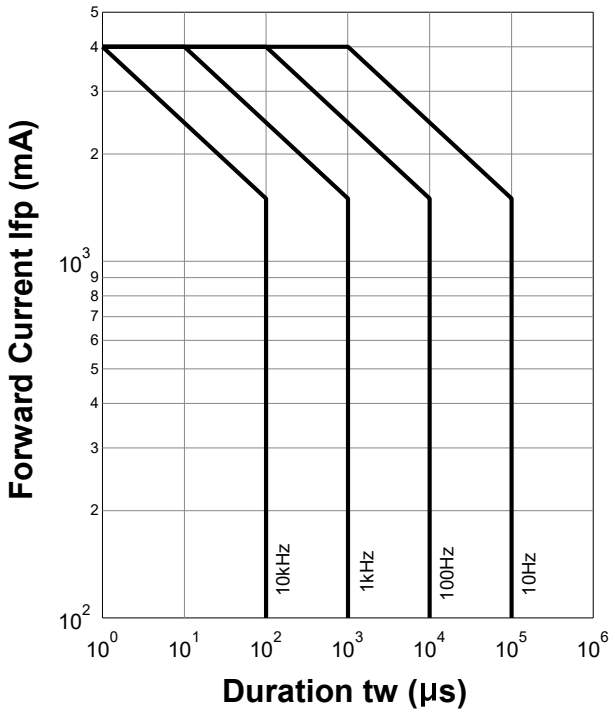


Allowable Forward Current - Ambient Temperature

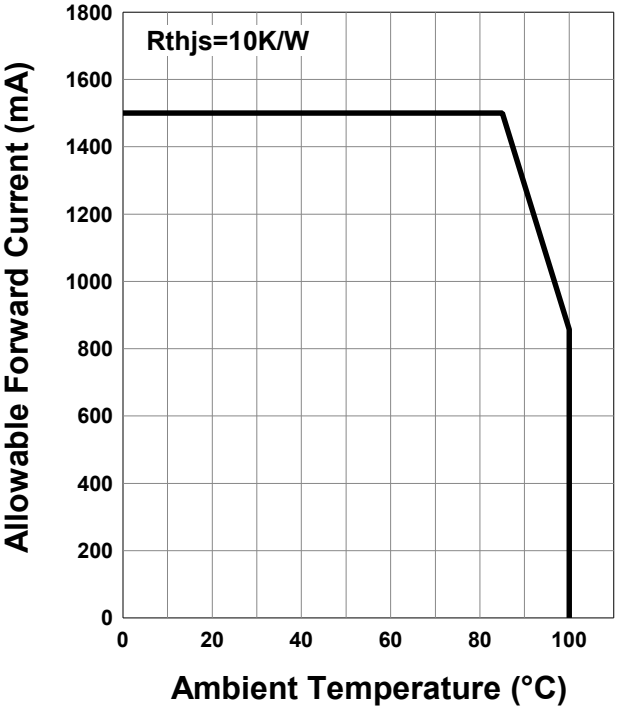


Marubeni

SMBB1370D-1100 rev. B


Forward Voltage - Ambient Temperature

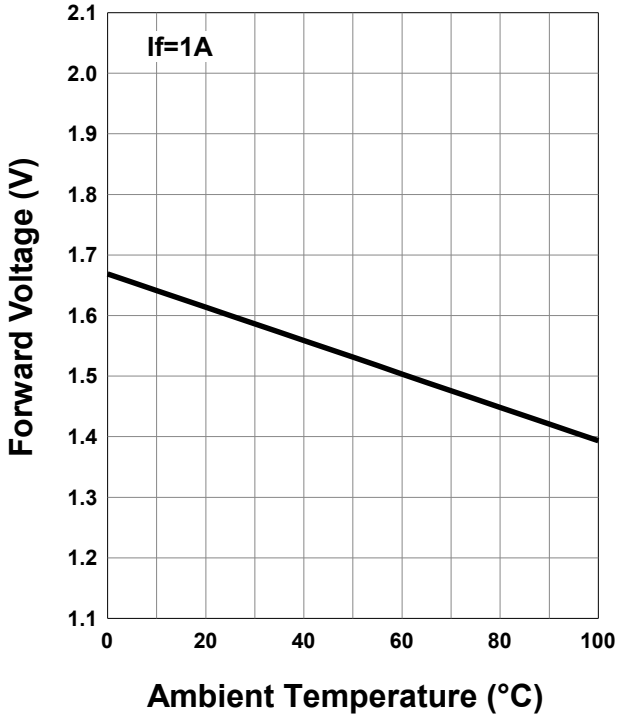

Relative Radiant Intensity - Ambient Temperature

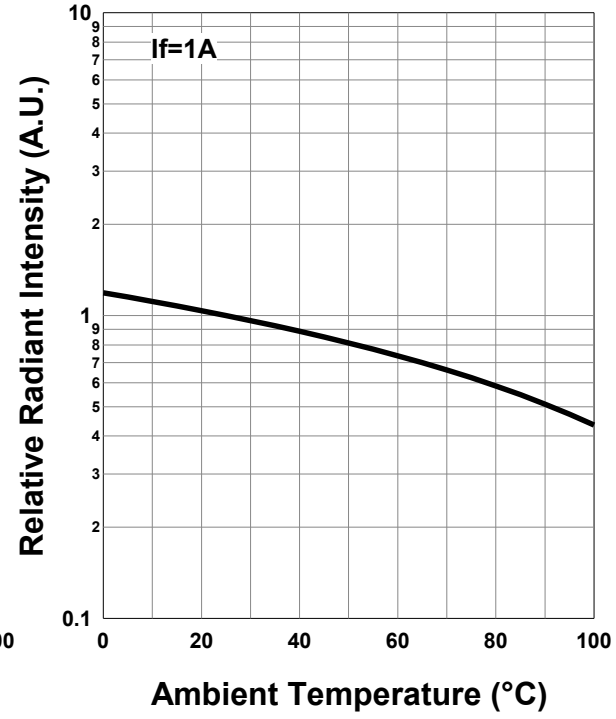



Peak Wavelength - Ambient Temperature

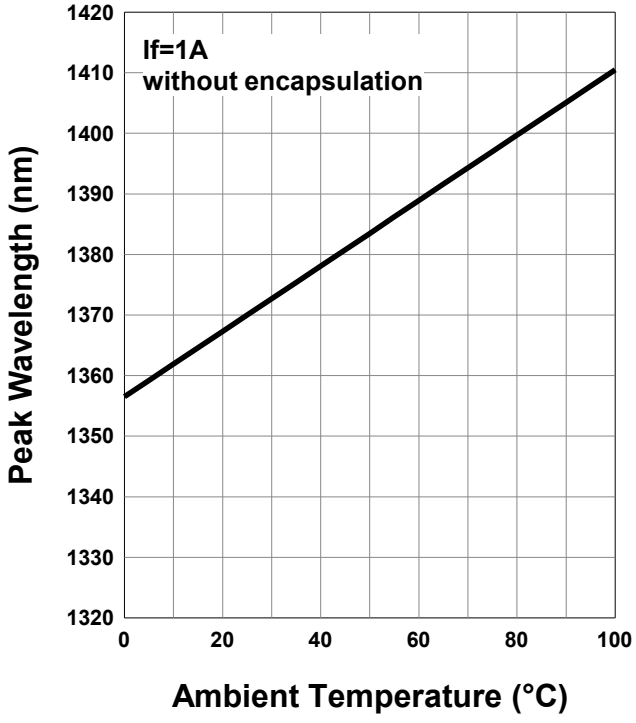


Marubeni

SMBB1370D-1100 rev. B

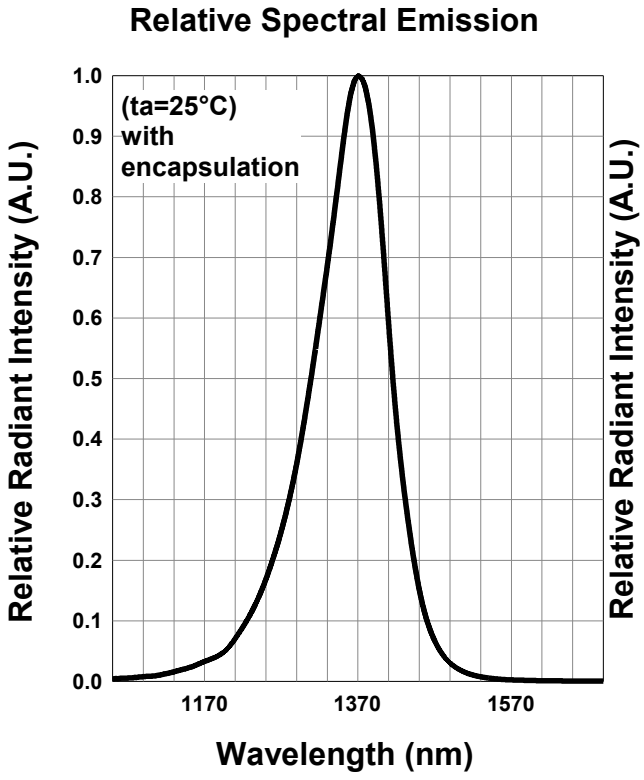


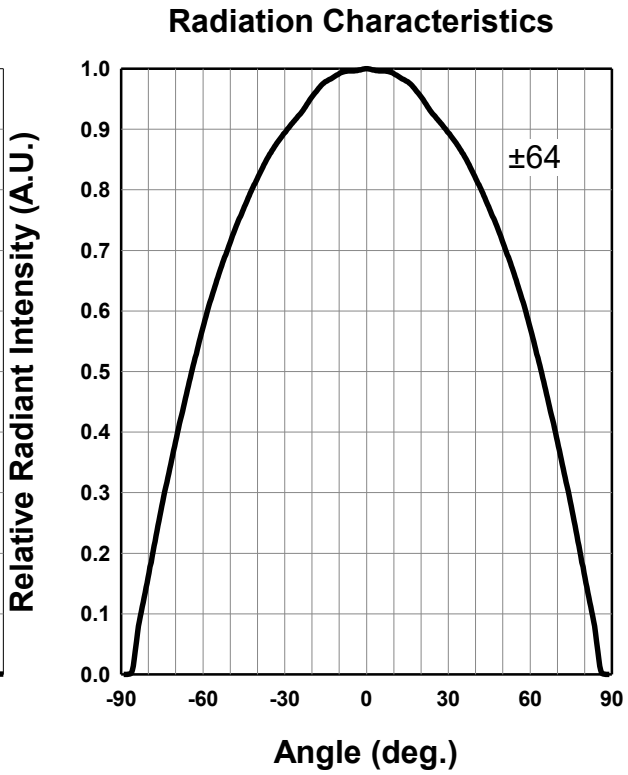

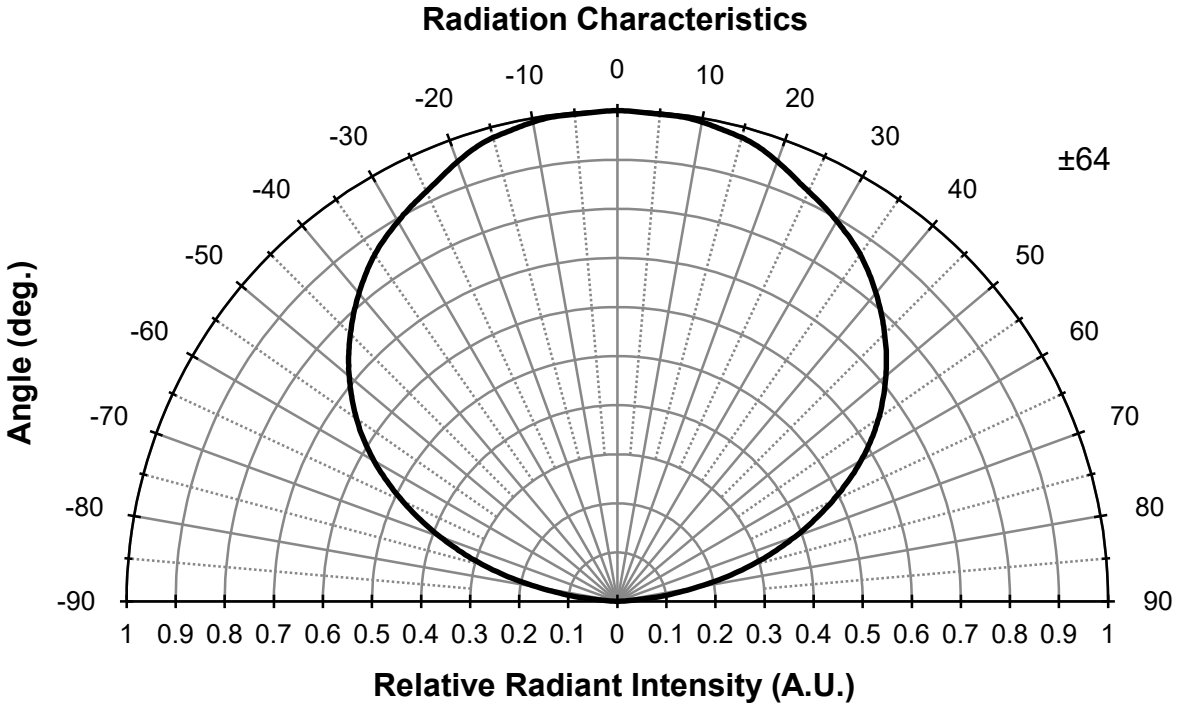

SMBB1370D-1100 rev. B

*The absorption of lens resin changes spectral emission.

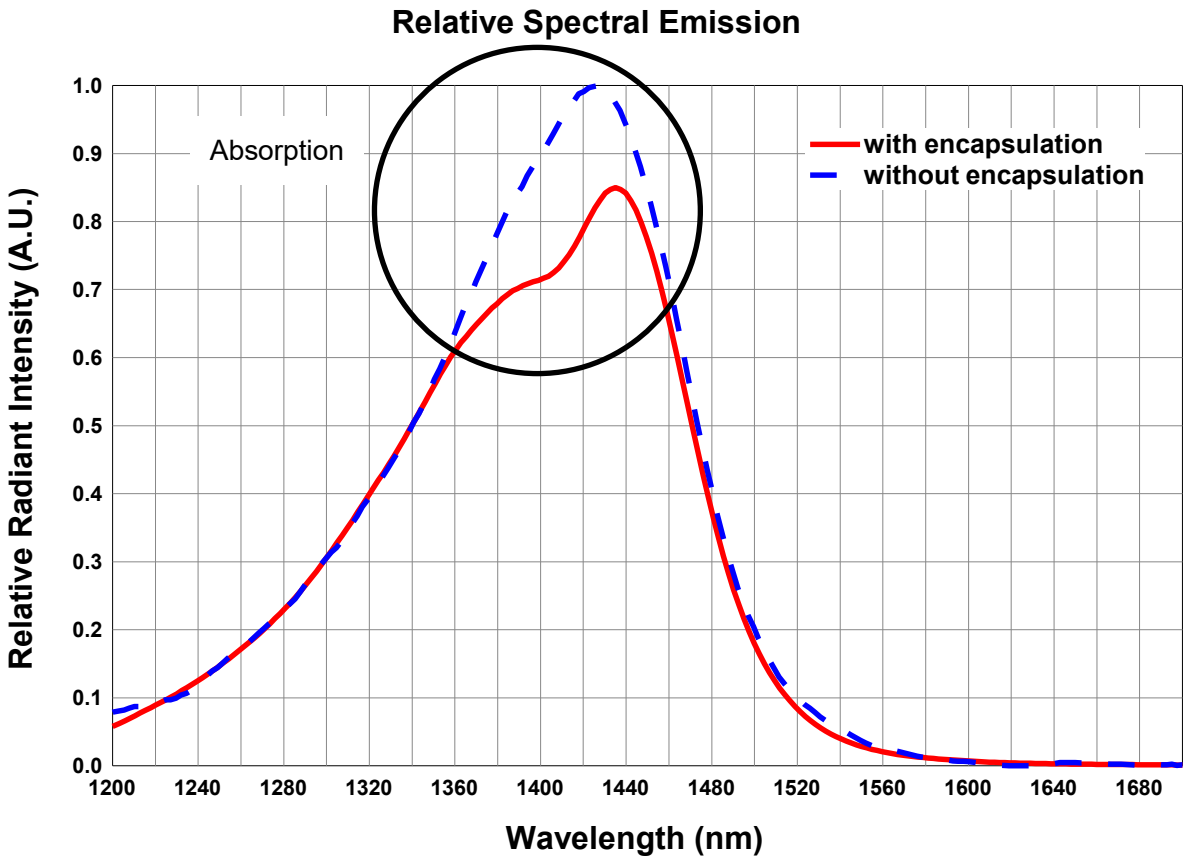

Wrapping

Moisture barrier bag aluminum laminated film with a desiccant to keep out the moisture absorption during the transportation and storage.

SMD LED storage and handling precautions

Storage Conditions before Opening a Moisture-Barrier Aluminum Bag

- Before opening a moisture-barrier aluminum bag, please store it at <30ºC, <60%RH.
- Please note that the maximum shelf life is 12 months under these conditions.

Storage Conditions after Opening a Moisture-Barrier Aluminum Bag

- After opening a moisture-barrier aluminum bag, store the aluminum bag and silica gel in a desiccator.
- After opening the bag, please solder the LEDs within 72 hours in a room with 5 - 30ºC, <50%RH.
- Please put any unused, remaining LEDs and silica gel back in the same aluminum bag and then vacuum-seal the bag.
- It is recommended to keep the re-sealed bag in a desiccator at <30%RH.
- The 72-hour- long floor life does not include the time while LEDs are stored in the moisture-barrier aluminum bag. However, we strongly recommend to solder the LEDs as soon as possible after opening the aluminum bag.

Notes about Re-sealing a Moisture-Barrier Aluminum Bag

- When vacuum-sealing an opened aluminum bag, if you find the moisture-indicator of the silica gel has changed to pink from blue (indicating a relative humidity of 30 % or more), please do not use the unused LEDs, the aluminum bag, or the silica gel.

Notes about Opening a Re-sealed Moisture-Barrier Aluminum Bag

- When opening a vacuumed and re-sealed aluminum bag in order to use the remaining LEDs stored in the bag, if you find that the moisture-indicator of the silica has changed to pink, please do not use the LEDs.

SMBB1370D-1100 rev. B

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

Technical Support Information

The product is manufactured by USHIO Inc. and the spec information is also from USHIO Inc.

Marubeni America Corporation
Email: sales@tech-led.com | URL: www.tech-led.com