

L395R-04**UV LED Lamp with UV Resistant Resin**

L395R-04 is an InGaN LED mounted on a lead frame with UV resistant resin.

On forward bias, it emits a band of visible light that peaks 395nm.

This UV series is designed for long life under UV beam.


<Features>

- High Reliable for long life under UV beam
- High Output Power at 395nm

<Specifications>

1. Product Name: UV LED Lamp
2. Type Number: L395R-04
3. Chip:
 - Chip material: InGaN
 - Peak Wavelength: 395nm typ.
4. Package
 - Type: $\Phi 5\text{mm}$ clear molding
 - Resin Material: UV Resin
 - Lead Frame: Soldered(Lead Free)

Outer Dimension (Unit:mm)

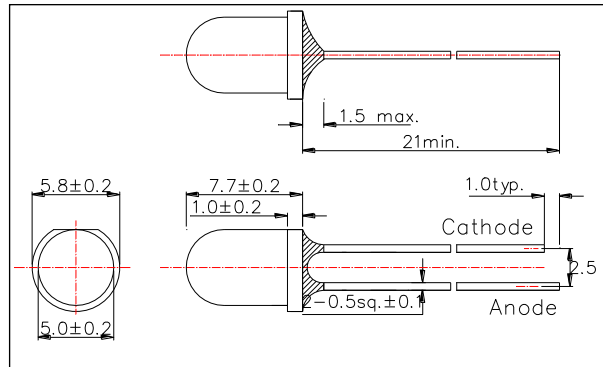

Absolute Maximum Ratings[Ta=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	220	mW
Forward Current	IF	50	mA
Pulse Forward Current*	IFP	100	mA
Reverse Voltage	VR	5	V
Thermal Resistance	Rthja	250	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	TOPR	-20 ~ +100	°C
Storage Temperature	TSTG	-20 ~ +100	°C
Soldering Temperature**	TSOL	265	°C

* Duty 1% and Pulse Width=10us

** Soldering condition must be completed within 3 second at 265 °C.


Electro-Optical Characteristics [Ta=25°C]						
Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=20mA		3.4	4.3	V
	VFP	IF=100mA		4.4		
Total Radiated Power*	PO	IF=20mA		27		mW
		IF=100mA		120		
Radiant Intensity**	IE	IF=20mA		82		mW/sr
		IF=100mA		360		
Peak Wavelength	λP	IF=20mA	390	395	400	nm
Half Width	$\Delta\lambda$	IF=20mA		13		nm
Viewing Half Angle	$\theta_{1/2}$	IF=20mA		± 11		deg
Rise Time	tr	IF=20mA		10		ns
Fall Time	tf	IF=20mA		10		ns

* Measured by S3584-08


** Measured by CIE127-2007 Condition B




Forward Current - Forward Voltage

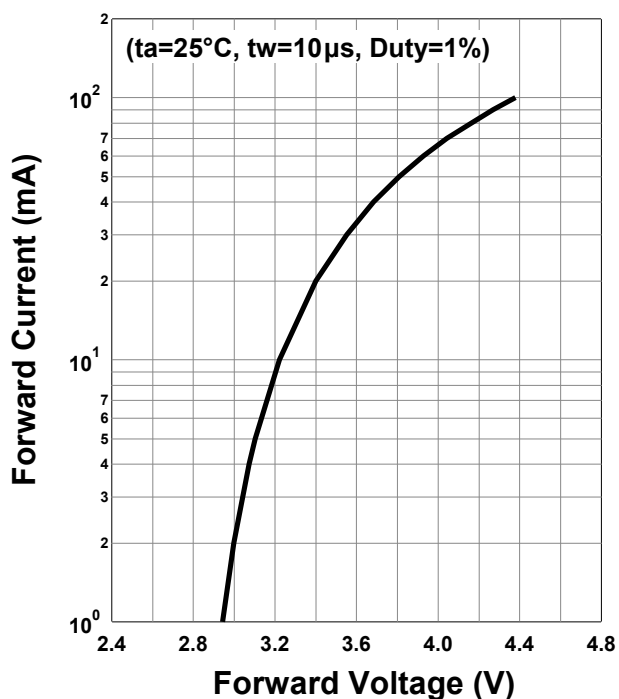


Relative Radiant Intensity - Forward Current



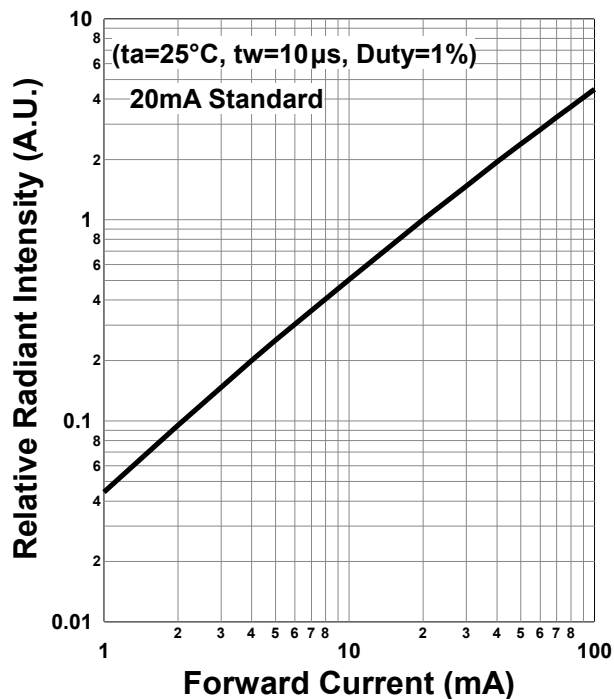




Forward Current - Pulse Duration

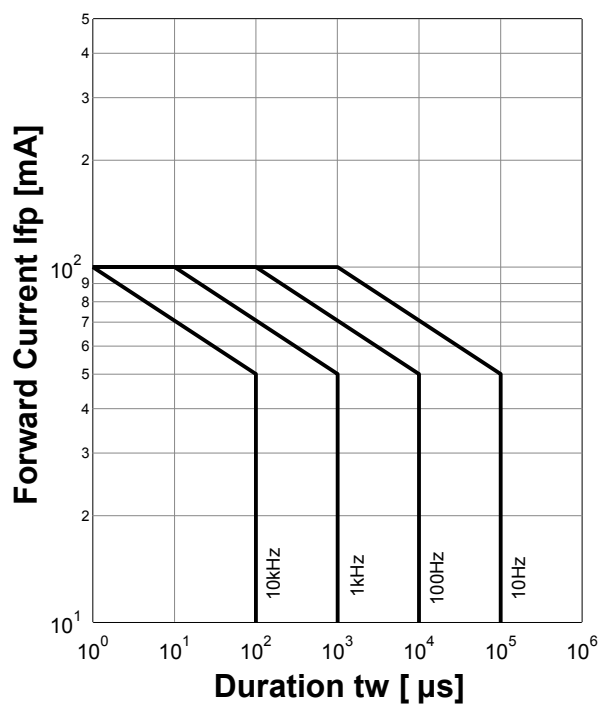

Allowable Forward Current - Ambient Temperature

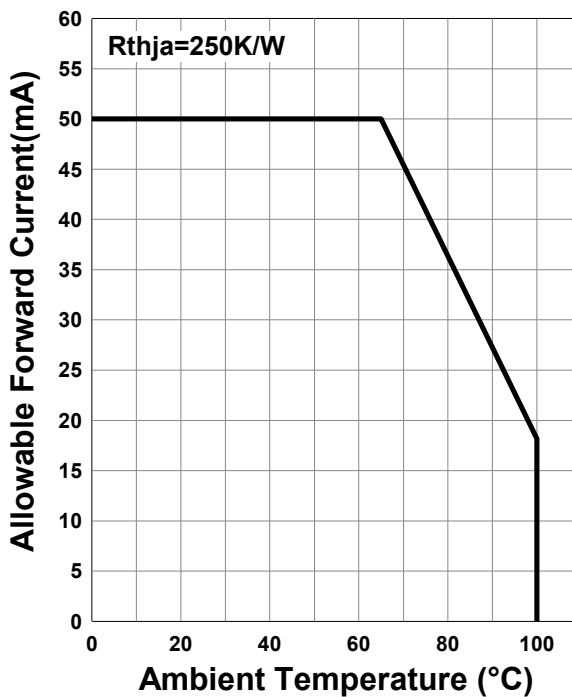

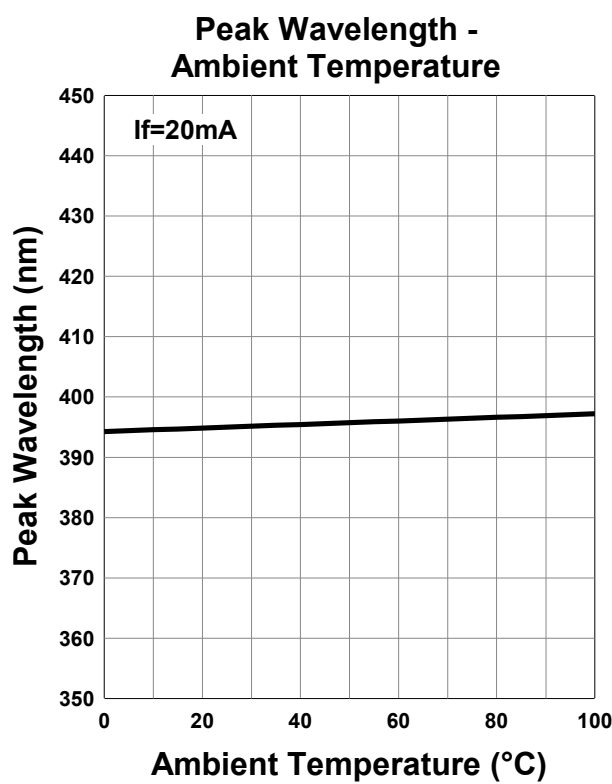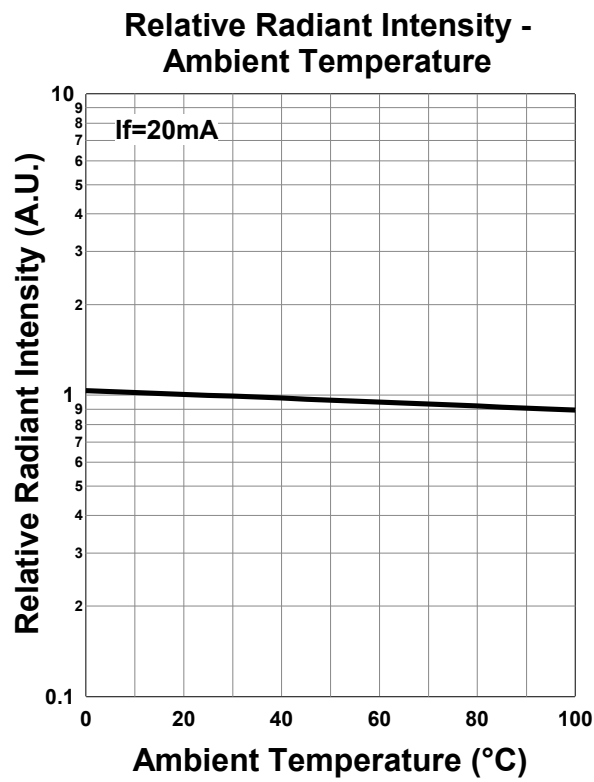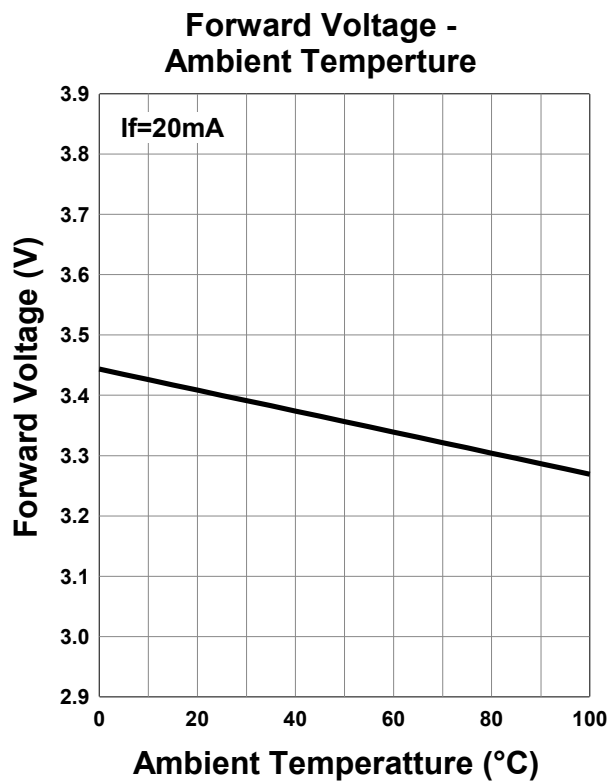

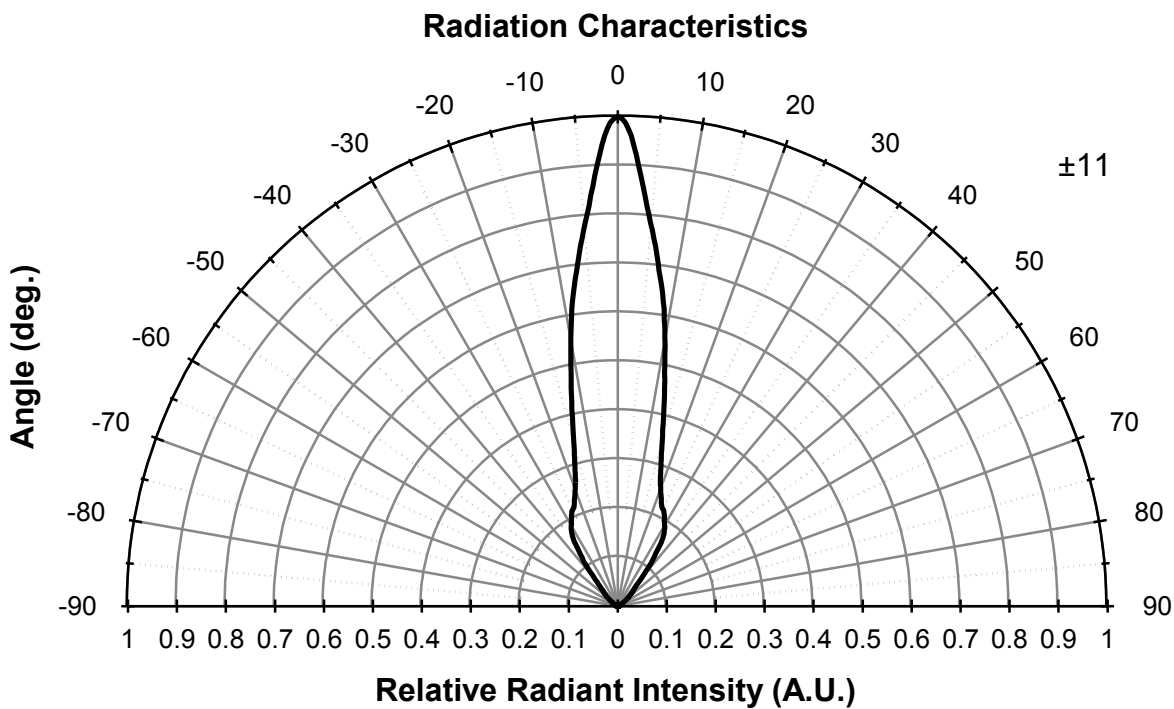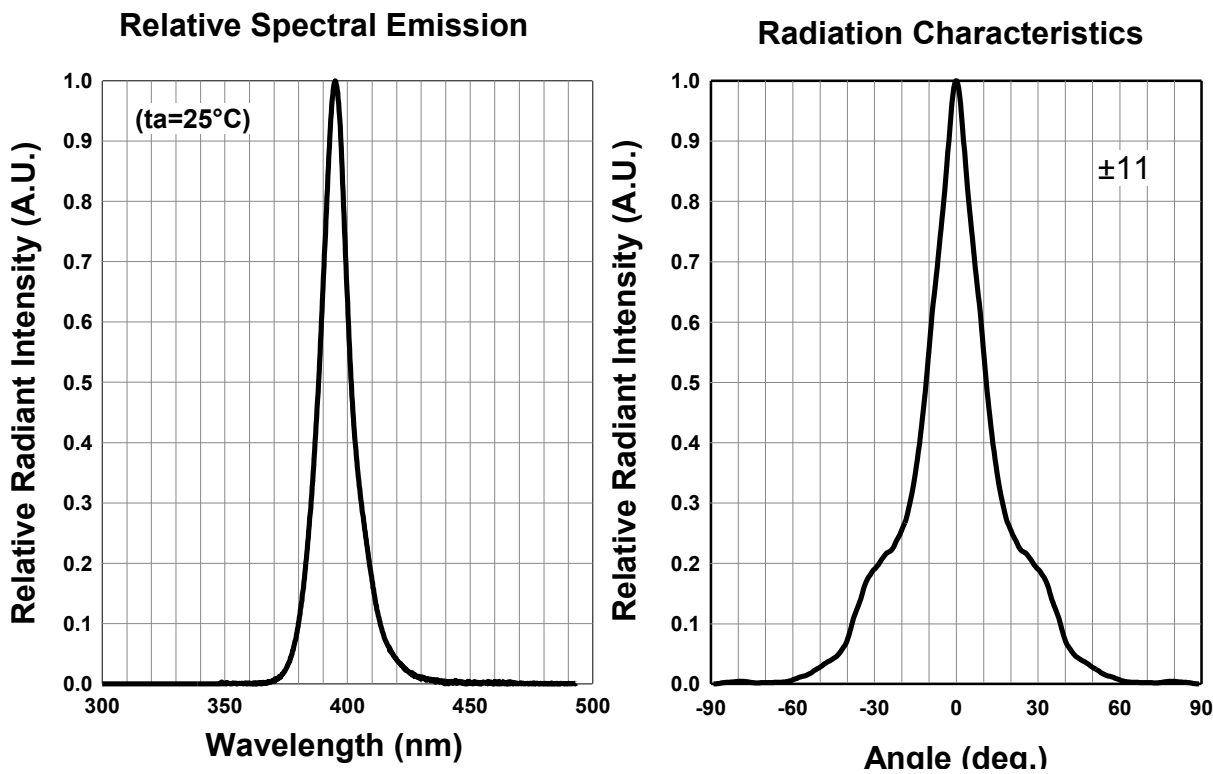

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements. Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.

2016.03