


L780D-66-16100
Red Color Illuminator

<Specifications>

- Chip Material: AlGaAs
- Chip Dimension: 1000um x 1000um
- Number of Chips: 16pcs
- Peak Wavelength: 780nm typ.
- Stem: TO-66 stem
- Lens: Silicone and/or Epoxy Resin

Outer Dimension (Unit:mm)

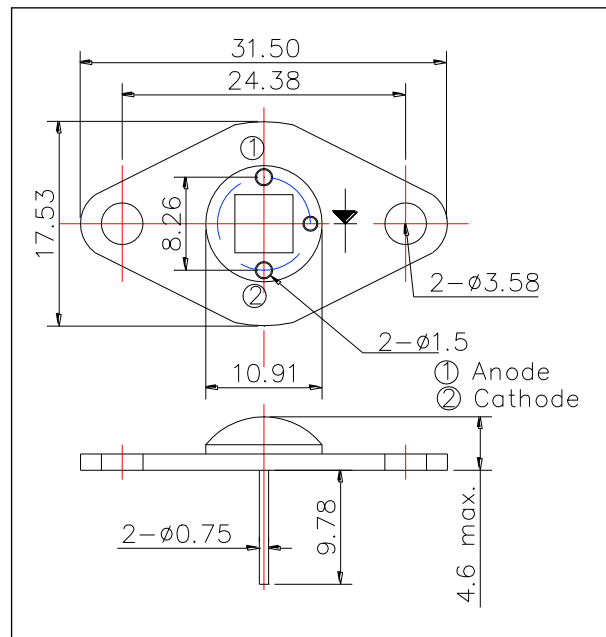

Absolute Maximum Ratings[Tc=25°C]			
Item	Symbol	Maximum Rated Value	Unit
Power Dissipation	PD	28	W
Forward Current	IF	3.2	A
Reverse Voltage	VR	20	V
Operating Temperature	TOPR	-40 ~ +85	°C
Storage Temperature	TSTG	-40 ~ +100	°C
Soldering Temperature*	TSOL	265	°C

* Soldering condition must be completed within 3 second at 265 °C.


Electro-Optical Characteristics[Tc=25°C]						
Item	Symbol	Condition	Min	Typ	Max	Unit
Forward Voltage	VF	IF=3.2A		8.7		V
Total Radiated Power*	PO	IF=3.2A		5600		mW
Peak Wavelength	λ_p	IF=3.2A	770	780	790	nm
Half Width	$\Delta\lambda$	IF=3.2A		28		nm
Viewing Half Angle	$\theta_{1/2}$	IF=100mA		± 64		deg

* Measured by S3584-08




Typical Characteristic Curves


Forward Current - Forward Voltage

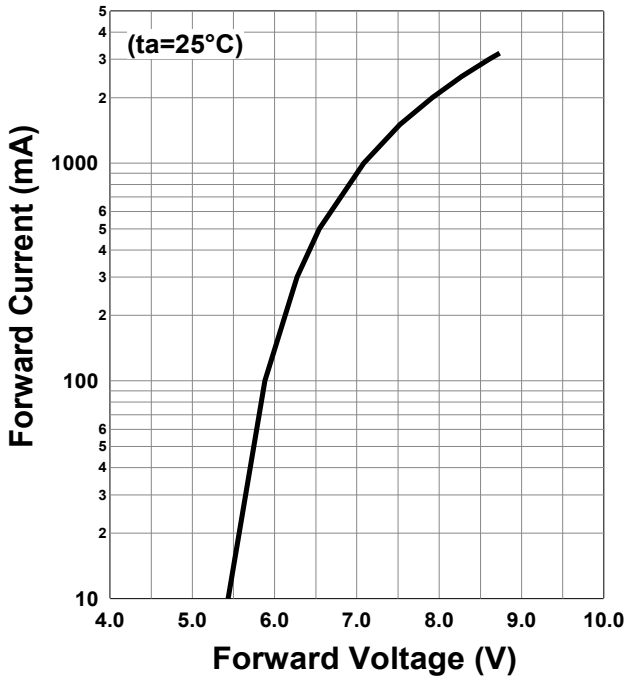





Relative Radiant Intensity - Forward Current

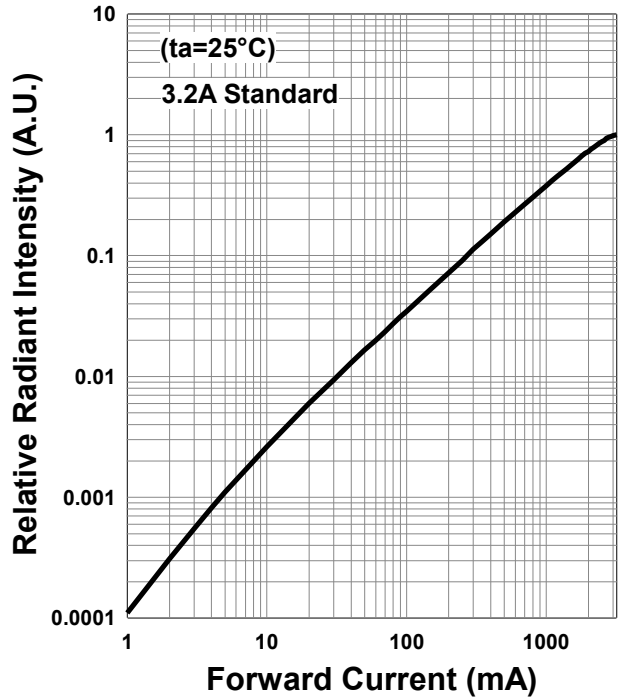

Radiation Characteristics

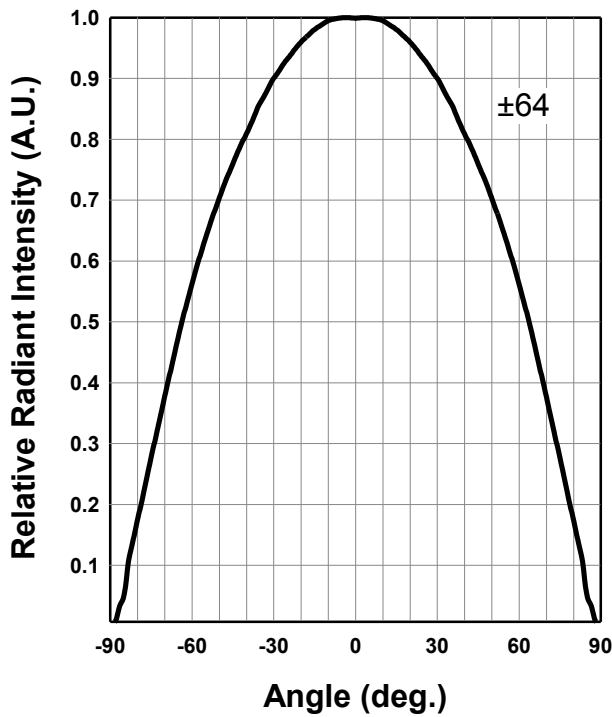

*The data below shows the characteristics of one representative TO-66 chip.

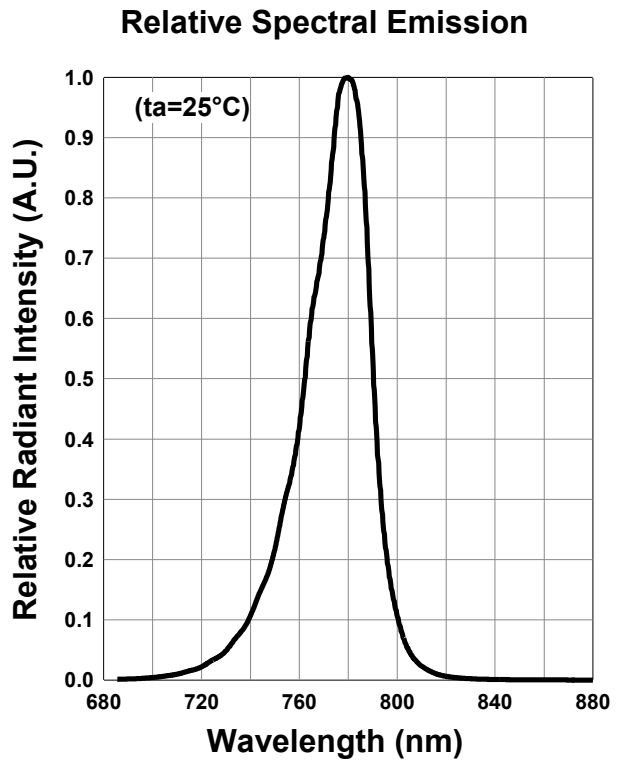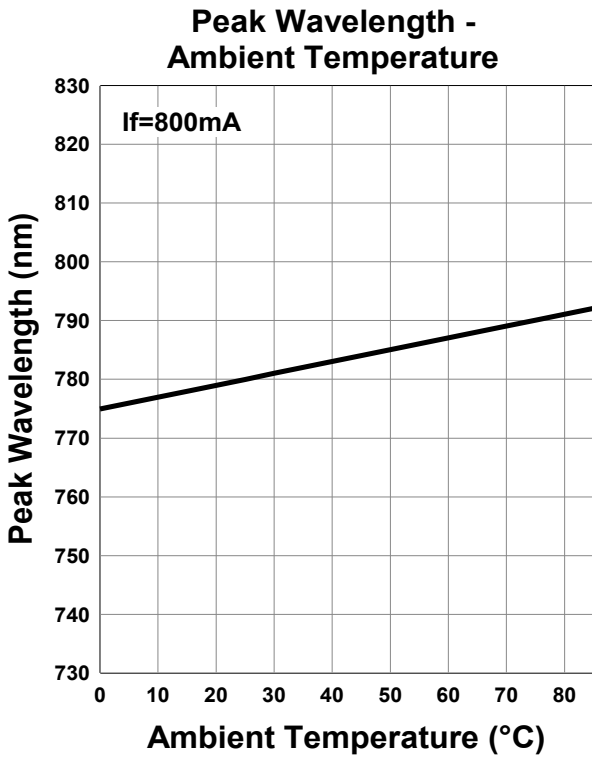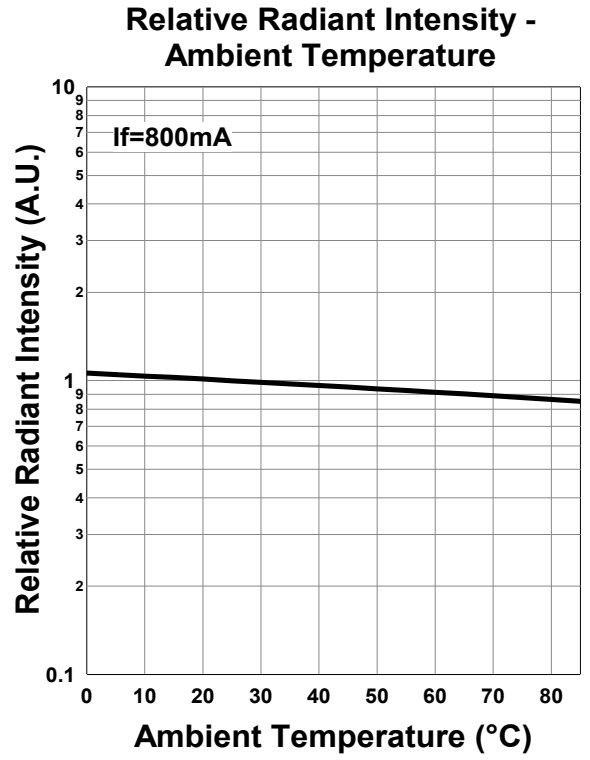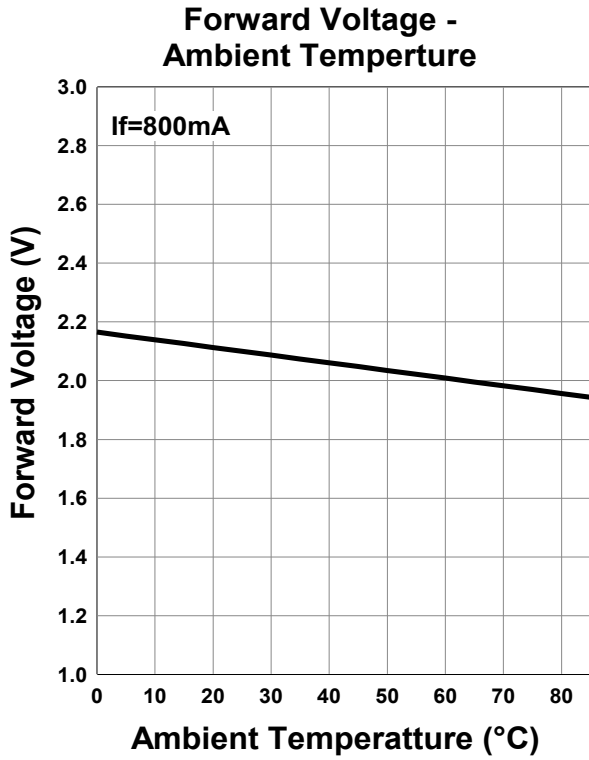

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements.

Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment.

Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.