


PRELIMINARY

L800-66-60-550

Infrared illuminator

Outline and Internal Circuit

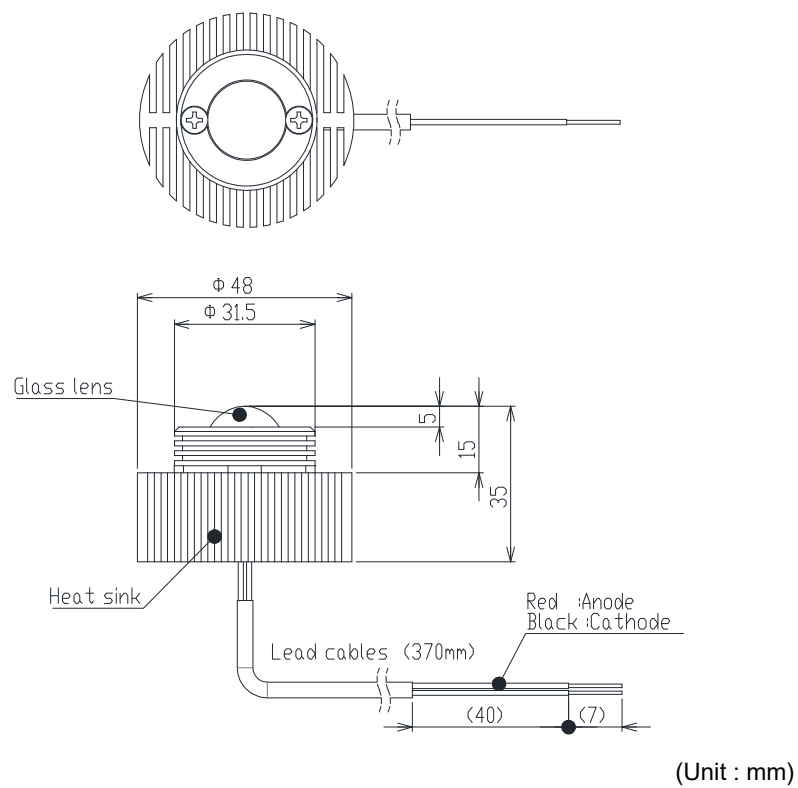

Features

- Chip Material : AlGaAs
- Chip Dimension : 400um * 400um
- Number of Chips : 60pcs
- Peak Wavelength : 800nm typ.
- Stem : TO-66 stem
- Lens : Silicone and/or Epoxy resin

Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Ratings	Unit
Power Dissipation	PD	12	W
Forward Current	IF	1200	mA
Reverse Voltage	VR	25	V
Thermal Resistance	Rthja	2	K/W
Junction Temperature	Tj	120	°C
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature	TSOL	265	°C

‡Soldering condition: Soldering condition must be completed with 3 seconds at 265°C.

Optical and Electrical Characteristics (Tc=25°C)


(*: 100% testing, **: reference value)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Forward Voltage	VF		9.0	10	V	IF=600mA*
Reverse Current	IR			10	uA	VR=25V*
Total Radiated Power	PO		550		mW	IF=600mA*
Peak Wavelength	λp	790		810	nm	IF=600mA*
Half Width	Δλ		29		nm	IF=600mA**
Viewing Half Angle	θ1/2		±27		deg.	IF=100mA**
Rise Time	tr		10		ns	IF=600mA**
Fall Time	tf		20		ns	IF=600mA**


‡ Radiated Power is measured by S3584-08.

Typical Characteristic Curves


Forward Current - Forward Voltage


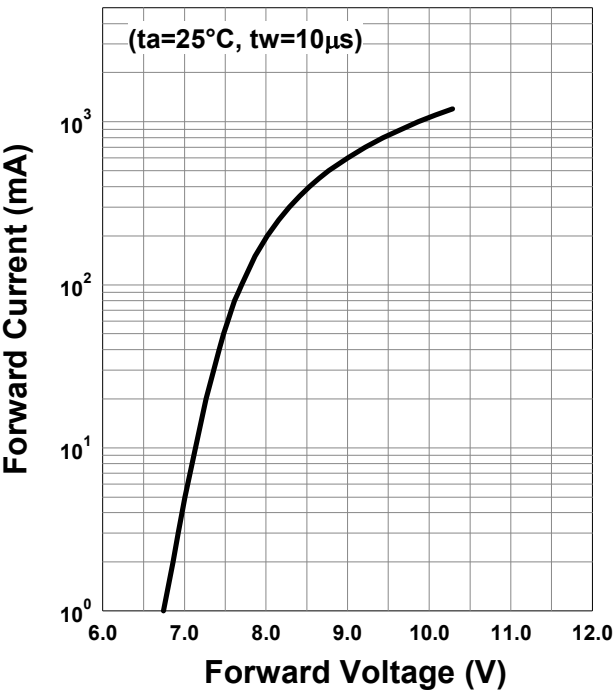


Relative Radiant Intensity - Forward Current




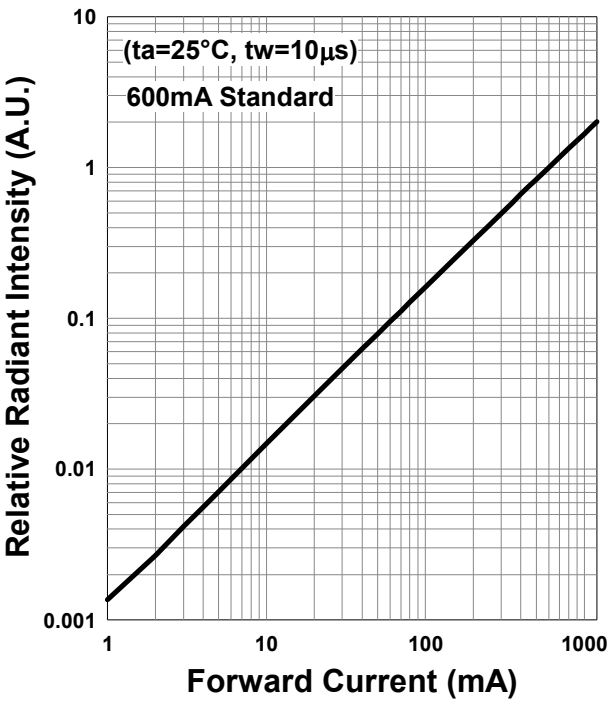


Allowable Forward Current - Ambient Temperature

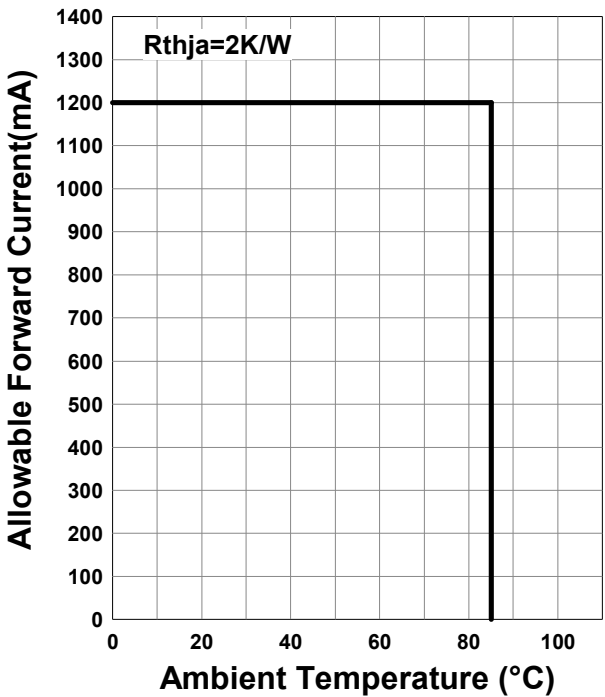

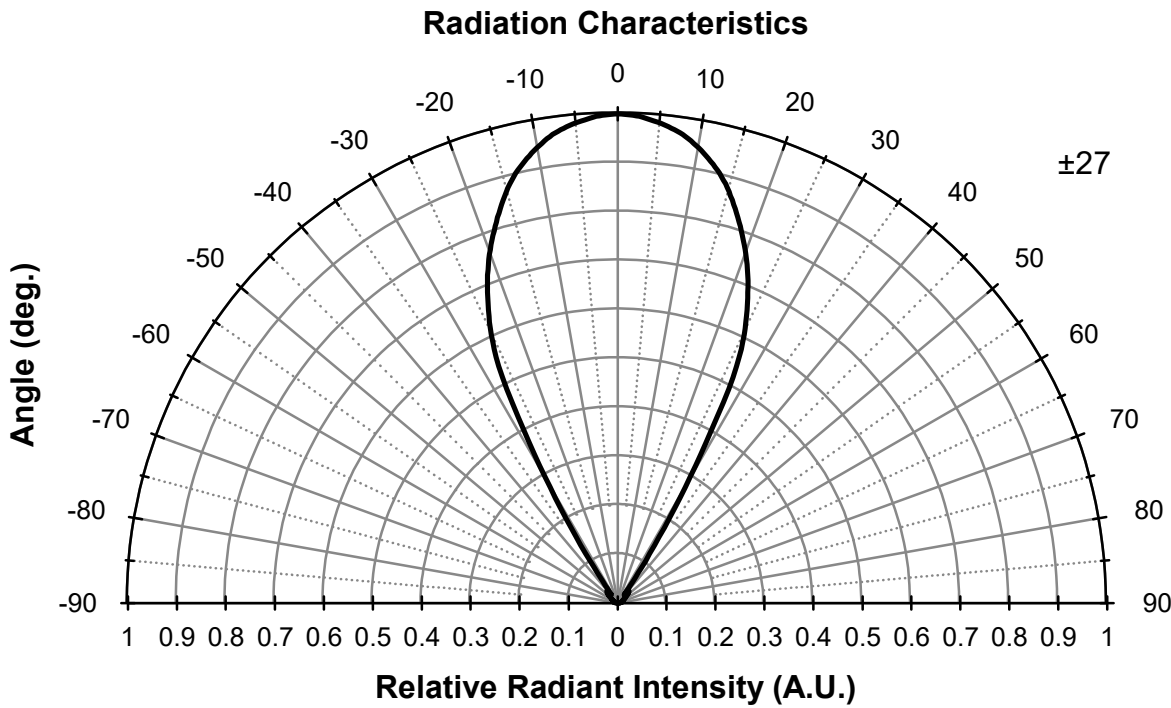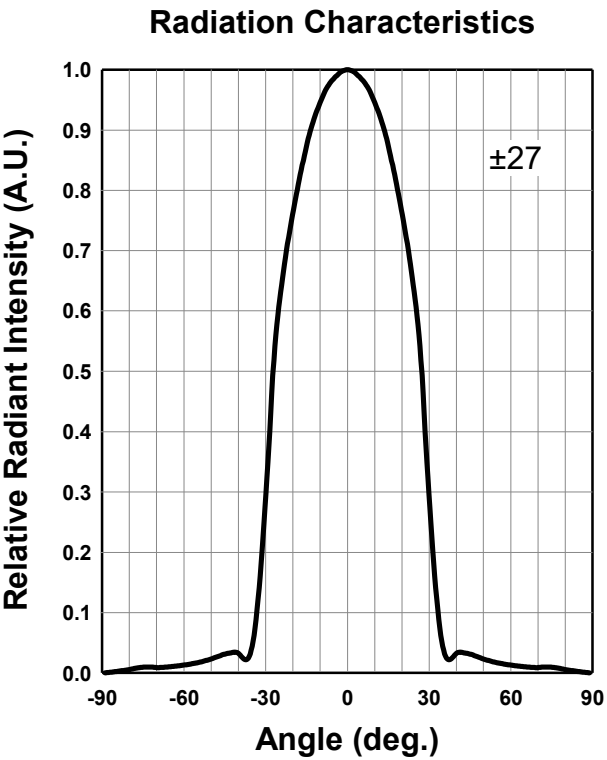

*The data below shows the characteristics of one representative TO-66 chip.

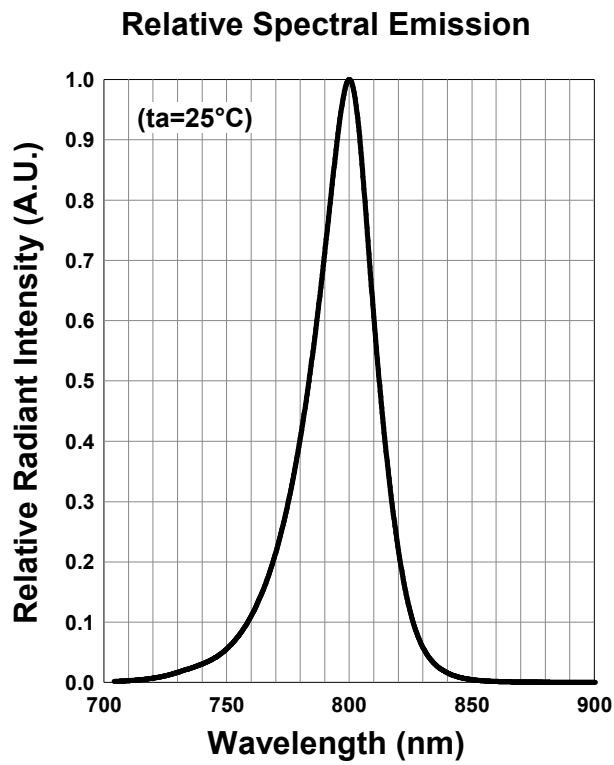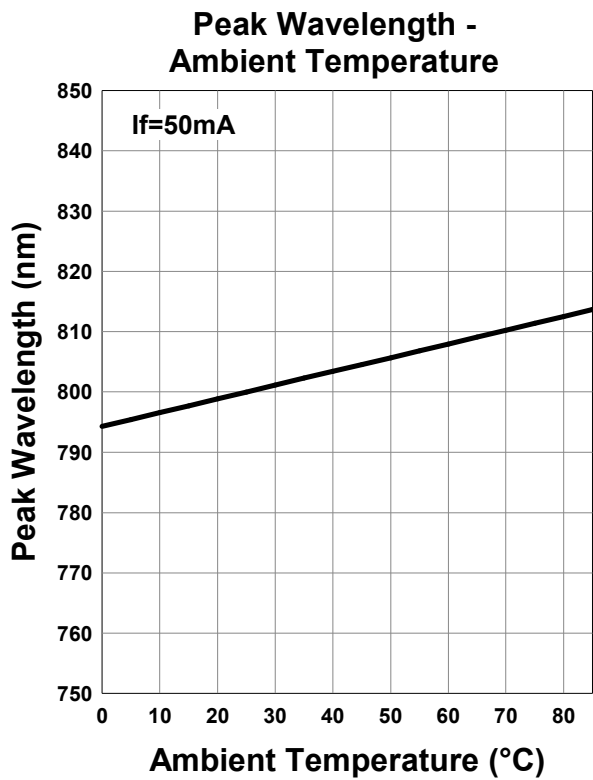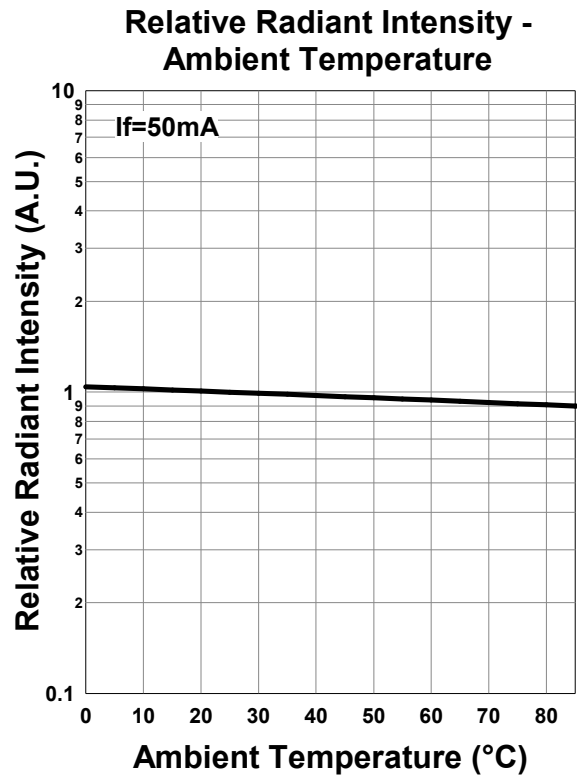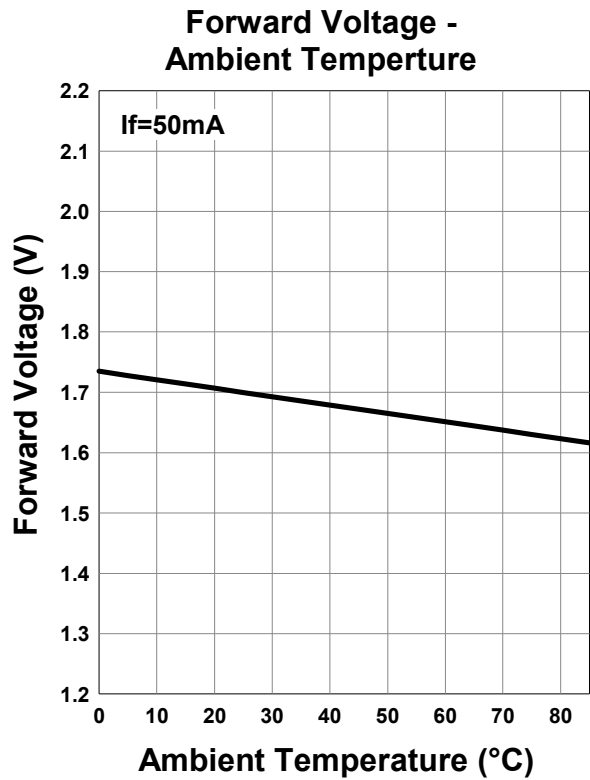

Disclaimer

Product specifications and data shown in this product catalog are subject to change without notice for the purposes of improving product performance, reliability, design, or otherwise.

Product data and parameters in this catalog are typical values based on reasonably up-to-date measurements.

Product data and parameters may vary by user application and over time.

Products shown in this catalog are intended to be used for general electronic equipment. Products are not guaranteed for applications where product malfunction or failure may cause personal injury or death, including but not limited to life-supporting / saving devices, medical devices, safety devices, airplanes, aerospace equipment, automobiles, traffic control systems, and nuclear reactor control systems.